








# 360

heightsafe















TRAINING • GEAR • PROJECTS

-  HARNESSES
-  LANYARDS
-  SLINGS
-  CONNECTORS
-  HELMETS
-  DESCENDERS
-  ASCENDERS
-  PULLEYS
-  ROPES
-  RETRACTABLE LIFELINES
-  BAGS & POUCHES
-  ACCESSORIES
-  READY TO USE SYSTEMS
-  ANCHOR SYSTEMS

## GEAR CATALOGUE

### 2023



<b>1. ABOUT HEIGHT SAFE 360 GEAR.....</b>	<b>1</b>
<b>3. EQUIPMENT/PRODUCTS.....</b>	<b>11</b>
 Harnesses .....	13
 Lanyards .....	17
 Slings .....	21
 Connectors .....	27
 Helmets .....	33
 Descenders .....	37
 Ascenders.....	41
 Pulleys .....	45
 Retractable Life Lines .....	49
 Ropes .....	47
 Bags .....	57
 Accessories .....	61
 Ready to use Systems .....	71
• No Limits Fall Arrest Kits .....	72
• Rope Access Basic Kit .....	73
• Rope Access Professional Kit .....	74
• Fall Arrest Supervisor Kit .....	75
• Temporary Vertical Life Lines .....	76
• Temporary Horizontal Life Lines .....	77
• Basic Rigging Kit .....	78
• Low Fall Arrest System .....	79
• Snatcher Self-Rescue Kit .....	80
• Snatcher Remote Fall Arrest Kit .....	81
• Haul Track System .....	83
 Anchor Systems .....	84





# DISCLAIMER


---

Worldwide publishing rights held by Height Safe 360 (Pty) Ltd Unit i11 & i12, Tillbury Business Park, 1030 Sixteenth St. Midrand, Gauteng, South Africa. No part of this document may be reproduced by any means, nor transmitted, nor translated into a machine language without prior written permission of the publisher.

The information contained in this reference material is distributed as a guide only. It has been compiled from sources believed to be reliable and to represent the best current opinion on the subject.

No warranty, guarantee or representation is made by Height Safe 360 (Pty) Ltd, as to the absolute correctness or sufficiency or any representation contained in this reference material, and Height Safe 360 (Pty) Ltd assumes no responsibility in connection herewith, nor can it be assumed that all other measures may not be required in particular or exceptional conditions or circumstances.

Height Safe 360(Pty) Ltd does not undertake to provide revision services or guarantee accuracy, we shall be pleased to respond to your individual requests for information at any time.

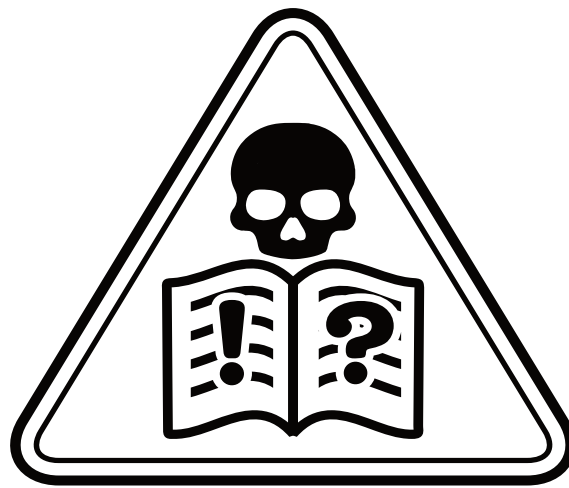

---

WORKING AT HEIGHT ACTIVITIES ARE  
POTENTIALLY DANGEROUS. FAILURE TO  
ABIDE BY THESE WARNINGS MAY RESULT  
IN SERIOUS INJURY OR DEATH.

---



# 1

## ABOUT HEIGHT SAFE 360™ GEAR

Height Safe 360 Gear is constantly striving to position itself in the working at height industry development, manufacturing and distributing a full range of Fall Arrest, Rope Access, and Rope Rescue equipment. Through our certified ISO9001 of 2015 Quality Management system we can guarantee a high-quality product every time.

### Our Vision:

Setting the market standard by manufacturing and supplying the Height Safe 360™ brand globally to the working-at-height industry including the Fall Arrest, Rope Access and Rope Rescue sectors.


### Our Mission:

The manufacture, assembly and supply of a full range of cost effective, durable, easy-to-use, safe working-at-height equipment and systems.

## DESIGN HEIGHT SAFE 360™ GEAR

Height Safe 360 is proud to introduce their own research and development department that focuses on the improvement and development of all the industries equipment and systems.

The designs are created to focus on the end user to ensure that the equipment is cost effective, ergonomically acceptable and functional.

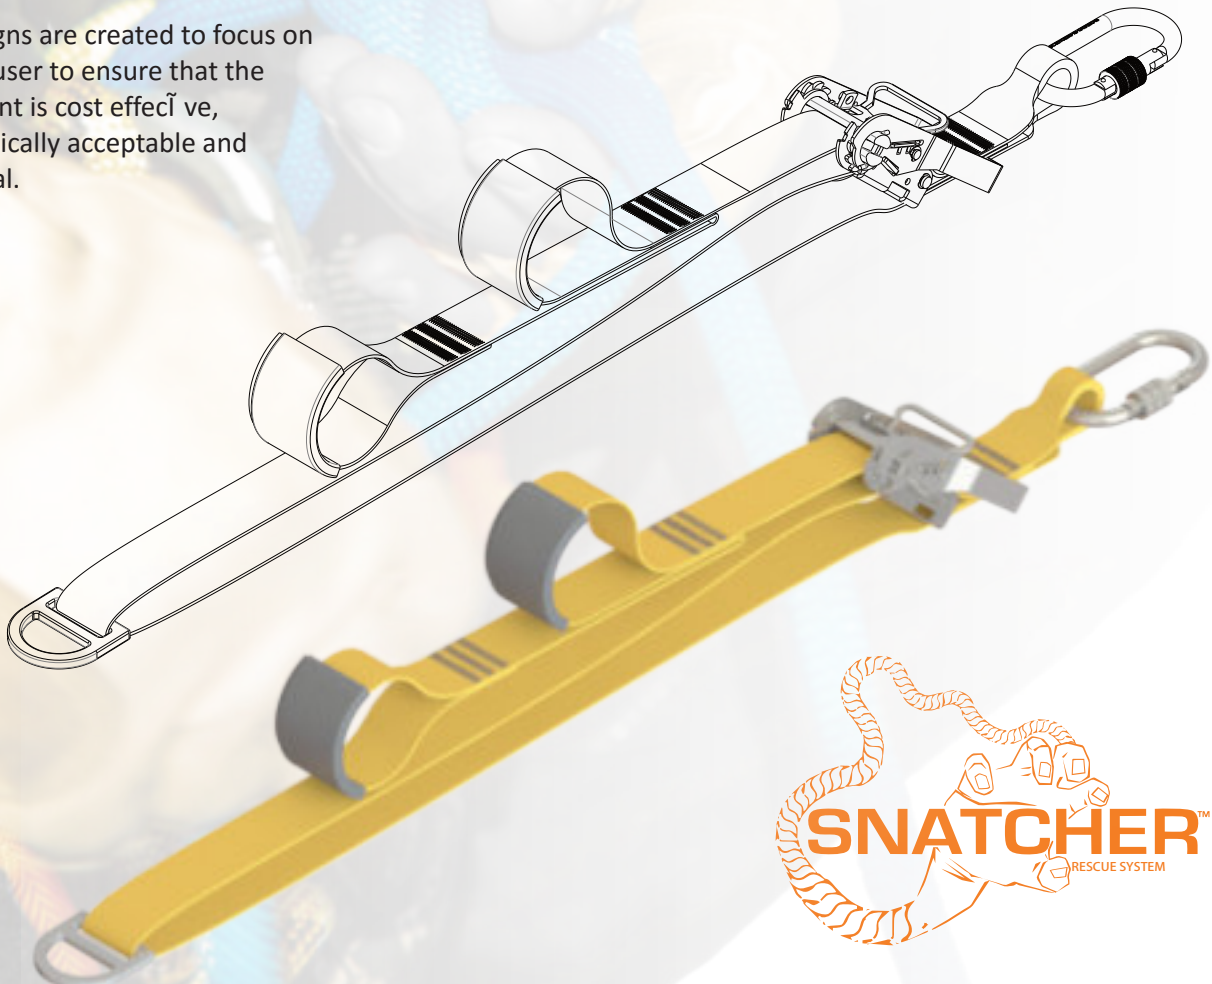






#### Connecting Points

Confined space rescue connecting points/loops on each shoulder strap of the harness.

#### Bent D-ring

The D-ring is used as the main attachment point for the descender and main rope lanyard attachment point.

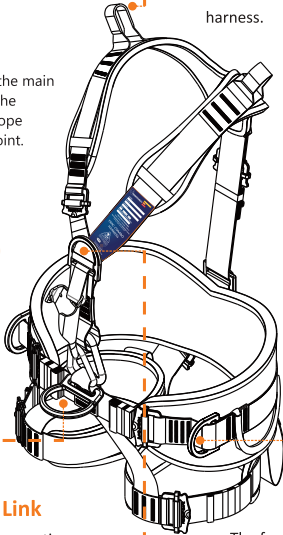


#### D-ring

D-rings on either side of the waist support are used as connecting points for work positioning lanyards during fall arrest operations

#### Delta Quick Link

Waist and shoulder connection point, with 8mm delta quick link for chest ascender




#### D-ring

The front attachment point ("A") with chest ascender strap



#### D-ring

The back (dorsal) attachment point ("A")




#### Slider Buckle

Adjustable buckle to fit harness to users body



#### Gear Loop

Provides quick access and storage to equipment when working at heights, not exceeding 8kg

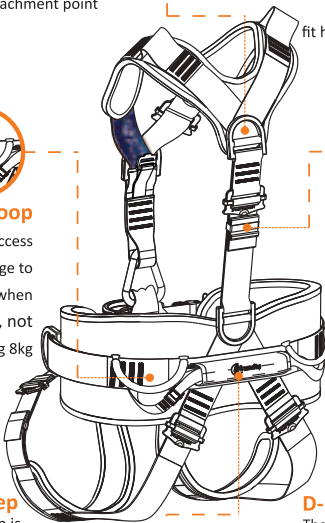

#### Elastic band

Prevents any loose ends of webbing from getting into the users way

#### Trauma Step

The trauma step is used for post fall arrest rescue situations and is designed to stand in to improve blood flow and circulation on the legs.



#### D-Ring

The bottom back D-ring is not a load bearing point but specifically designed for the attachment of the rope access seat. This can also be used as a tool attachment point for tools not exceeding 8 kg.





# 360

heightsafe

TRAINING • GEAR • PROJECTS



Our harnesses are designed to be user-friendly, comfortable and light weight.  
Made from sustainable material and conforming to the required local standards.

Used for Fall Arrest, Rope Access and rope rescue applications.







## ALTUMAX BASIC HARNESS



## HH3/003 ĚŠĽF | HH3/004 ĚĽLF

### DESCRIPTION:

The Altumax Basic Harness was designed for Fall Arrest work when using multiple types of Fall Arrest Systems to access the working area. The harness comes with quick clip buckles for faster and easier fitting. The harness is unique in that it has one dorsal and two chest attachment points which makes it useful when moving vertically and horizontally, using more than one type of Fall Arrest System.

### PRODUCT FEATURES:

- Reflective strip for higher visibility
- Fully adjustable
- Quick-clip buckles on the legs and on the chest for easy fitment
- Front and back attachment points
- Attachment point for use with a retractable life line

### SPECIFICATIONS:

Material:	Polypropylene webbing
Weight:	1.624 kg
Waist belt:	70 cm to 140 cm
SANS Standard:	SANS 50361
Safe Working Load:	100 kg -120 kg

## NO-LIMIT HARNESS



## HH1/001/T ĚŠĽF | HH1/002 ĚĽĽĽĽF

### DESCRIPTION:

The No-Limits Fall Arrest Harness is a full body, adjustable, padded harness with front and rear Fall Arrest attachment points. Quickclip buckles on the legs and on the chest for easy fitment. Attachment point for use with a retractable life line.

A padded work positioning system is incorporated into the waist section of the harness which comes complete with side D-rings. The harness works with a quick clip buckle system for faster fitting. The harness is fitted with a trauma step rescue loop that can be used, in the event of a fall to prevent the effects of suspension trauma.

### PRODUCT FEATURES:

- Fully Adjustable
- Fully padded
- Quick clip buckle system
- Work positioning belt
- Dorsal and chest Fall Arrest attachment points
- Trauma step rescue loop
- Gear loops

### SPECIFICATION

Material:	Polypropylene webbing
Weight:	2.340 kg (S-L)   2.424 kg (XL)
Waist belt:	50 cm to 140 cm
Standard:	SANS 50361/ SANS 50358
Safe Working Load:	100 kg -120 kg



## PRONMAX ROPE ACCESS COMPLETE



## HH2/001/N (S-L) | HH2/002/N (XL)

### DESCRIPTION:

The Altumax Rope Access Harness is fully padded, fully adjustable, and can be used for Fall Arrest, Rope Access and work positioning applications. The harness comes complete with front, waist, chest, dorsal and side waist attachments. The harness was designed for maximum comfort without restricting movement when performing Rope Access work for long periods of time.

### PRODUCT FEATURES:

- Fully padded
- Fully adjustable
- Dorsal and chest Fall Arrest attachment points
- Front waist abseiling attachment point
- Work positioning belt with attachment points
- Gear loops
- Comfortable
- Reflective edging for higher visibility

### SPECIFICATIONS:

Material:	Polypropylene webbing
Weight:	2 kg
Waist belt:	70 cm to 140 cm
Standard:	SANS 50361/ SANS 50358 / SANS 50813
Safe Working Load:	100 kg -120 kg

## PRONMAX ROPE ACCESS HARNESS



## HH2/001/N/COMP (S-L) | HH2/002/N/COMP (XL-XXL)

### DESCRIPTION:

The Altumax Rope Access Harness Complete is the original harness with the addition that all Rope Lanyards pre-sewn onto the harness. This makes the harness smaller, lighter, with no bulky knots that could come undone during every day Rope Access operations. The pre-sewn Rope Lanyards are significant time and risk savers.

### PRODUCT FEATURES:

- Fully padded
- Fully adjustable
- Dorsal and chest Fall Arrest Attachment points
- Front waist abseiling attachment point
- Work positioning belt with attachment points
- Gear loops
- 4 x Pre-sewn Rope Lanyards with captive eye
- Pre-sewn Rope Rescue link

### SPECIFICATIONS:

Material:	Polypropylene webbing
Weight:	2.4 kg
Waist belt:	70 cm to 140 cm
Standard:	SANS 50361/ SANS 50358 / SANS 50813
Safe Working Load:	100 kg -120 kg





## HEIGHT SAFE 360™

## HARNESSES SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

### ALTUMAX BASIC HARNESS

### HH3/003 (S-L) | HH3/004 (XL)



SANS 50361	Polypropylene webbing	100 kg -120 kg	1.624 kg
------------	-----------------------	----------------	----------

### NONIMIT HARNESS

### HH1/001/T (S-L) | HH1/002 (XL-XXL)



SANS 50361 SANS 50358	Polypropylene webbing	100 kg -120 kg	2.340 kg (S-L) 2.424 kg (XL)
--------------------------	-----------------------	----------------	---------------------------------

### PROMAX ROPE ACCESS HARNESS

### HH2/001/N (S-L) | HH2/002/N (XL)



SANS 50361 SANS 50358 SANS 50813	Polypropylene webbing	100 kg -120 kg	2 kg
--	-----------------------	----------------	------

### PROMAX ROPE ACCESS COMPLETE

### HH2/001/N/COMP (S-L) | HH2/002/N/COMP (XL-XXL)



SANS 50361 SANS 50358 SANS 50813	Polypropylene webbing	100 kg -120 kg	2.4 kg
--	-----------------------	----------------	--------

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# LANYARDS



Our Lanyards are designed to connect the harness to the anchor point or similarly to connect small items, such as tools, to avoid them from being dropped while working at height.





## ADJUSTABLE DOUBLE SHOCK ABSORBING LANYARD

**HL3/002**



### DESCRIPTION:

The Double Shock Absorbing Lanyard was designed as a Fall Arrest Device with two adjustable legs. The Lanyard comes complete with large type pylon / scaffold hooks that make connecting over big anchors easier.

The two legs give the user the ability to stay attached at all times while moving around in Fall Arrest situations. The adjustable buckles give the user the opportunity to shorten the Lanyard to decrease the falling distance.

### PRODUCT FEATURES:

- Fully adjustable
- Large scaffold / pylon hooks
- Two legs / Lanyards
- Shock Absorber

### SPECIFICATIONS:

Material:	Black tubular type Webbing 25 mm, Nylon & Shock Absorbing Webbing
Weight:	1.636 kg
Length:	70 cm to 175 cm
Standard:	SANS 50354   SANS 50355
Safe	working load: 100 kg

## WORK POSITIONING LANYARD

**HL1/001**



### DESCRIPTION:

The Work Positioning Lanyard was designed to be used in conjunction with a work positioning belt. This Lanyard can be attached around an object and connected back to the work positioning belt on the harness to have both hands free while working. It is fully adjustable to attach around larger or smaller anchors.

### PRODUCT FEATURES:

- Fully adjustable
- Double action safety hooks on both ends
- Safety sleeve to protect Webbing

### SPECIFICATIONS:

Material:	Polypropylene Webbing, PVC
Weight:	786 g
Length:	adjusting 103 cm to 200 cm
Standard:	SANS 50358   SANS 50362
Breaking Strength:	22 kN

## TOOL LANYARD



### HL4/001

#### DESCRIPTION:

The Tool Lanyard was designed to keep small basic hand tools attached to the harness at all times while working at height. The tubular Webbing with internal elastic system allows for more mobility and movement on the Lanyard while using the hand tool. The large connection loop at the end of the Lanyard gives the user the ability to attach the Lanyard directly to the harness.

#### PRODUCT FEATURES:

- Elasticated
- Webbing Loop for connecting to the harness
- Quick clip for connecting to the tool
- Sufficient length to use tools safely

#### SPECIFICATIONS:

Material:	Tubular Webbing 25 mm, Nylon with internal elastic
Weight:	66 g
Length:	adjusting 72 cm to 100 cm
Standard:	N/A
Safe Working Load:	8 kg (Max)

## WRIST LANYARD



### HL5/001

#### DESCRIPTION:

The Wrist Lanyard was designed to prevent basic hand tools from falling while working at height and while physically holding the tool in your hand. The Lanyard is adjustable and can be attached around the wrist of the user.

#### PRODUCT FEATURES:

- Adjustable wrist strap 25 mm wide
- Small connection clip for the tool
- Lightweight and durable

#### SPECIFICATIONS:

Material:	25 mm Nylon Webbing
Weight:	26 g
Length:	32.5 cm
Standard:	N/A
Safe Working Load:	4 kg (Max)





## HEIGHT SAFE 360™

## LANYARDS SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

ADJUSTABLE DOUBLE SHOCK  
ABSORBING LANYARD

## HL3/002



SANS 50354  
SANS 50355  
SANS 50362

Black tubular type  
Webbing 25mm, Nylon &  
Shock Absorbing Webbing

100 kg

1.636 kg

## WORK POSITIONING LANYARD

## HL1/001



SANS 50358  
SANS 50362

Polypropylene Webbing,  
PVC

Breaking Strength: 22kN

786 g

## TOOL LANYARD

## HL4/001



N/A

Tubular Webbing 25mm,  
Nylon with internal elastic

8 kg (Max)

66 g

## WRIST LANYARD

## HL5/001



N/A

25mm Nylon Webbing

4 kg (Max)

26 g

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# SLINGS



Our slings, come from years of practical experience to understand what actually works as an anchoring sling. They can be used for technical Rope Access aid climbing, to Fall Arrest and rescue anchoring of



## 60CM OPEN ROUND SLING



### HS1/001

#### DESCRIPTION:

The 60 cm Open Round Sling was designed as a fast anchoring method around a structure during Fall Arrest and Rope Access applications.

#### PRODUCT FEATURES:

- Light weight
- Durable

#### SPECIFICATION

Material:	Tubular Polypropylene Webbing.
Weight:	7 g
Length:	60 cm
Standard:	SANS 50566
Breaking Strength:	22 kN

## 120CM OPEN ROUND SLING



### HS1/002

#### DESCRIPTION:

The 120 cm Open Round Sling was designed as a fast anchoring method around a structure during Fall Arrest and Rope Access applications. The longer length can be used around bigger objects or as a friction anchor around smaller objects.

#### PRODUCT FEATURES:

- Light weight
- Durable

#### SPECIFICATION

Material:	Tubular Polypropylene Webbing
Weight:	140 g
Length:	120 cm
Standard:	SANS 50566
Breaking Strength:	22 kN

## 1.5M ANCHOR STRAP



### HS2/001

#### DESCRIPTION:

The 1.5m padded anchor strap was designed as a heavy duty anchoring sling when attaching Fall Arrest life lines, Rope Access Ropes and rescue systems around larger anchor structures.

#### PRODUCT FEATURES:

- Protective sleeve to protect load bearing Webbing parts
- Heavy duty D-rings for easy connection

#### SPECIFICATIONS:

Material:	PVC & Polypropylene Webbing
Weight:	490 g
Length:	150 cm
Standard:	SANS 50566   SANS50354
Breaking Strength:	22 kN



## 0.5M ANCHOR STRAP



### HS2/002

#### DESCRIPTION:

The 0.5m padded Anchor Sling was designed as a heavy duty anchoring method around a smaller object when attaching Fall Arrest life lines, Rope Access Ropes and rescue and Hauling Systems.

#### PRODUCT FEATURES:

- Protective sleeve to protect load bearing Webbing parts
- Heavy duty D-rings for easy connection

#### SPECIFICATIONS:

Material:	PVC & Polypropylene Webbing
Weight:	240 g
Length:	50 cm
Standard:	SANS 50566   SANS50354
Breaking Strength:	22 kN

## 60CM WIRE ROPE SLING



### HS3/001

#### DESCRIPTION

The 60 cm Wire Rope Sling was designed for heavy duty anchoring around an object where the structure is very abrasive and could damage a Webbing type sling. This type of sling is very useful during Rope Access aid climbing type working situations. This sling comes complete with protective Plastic Sleeve and thimble eyes for easy connection.

#### PRODUCT FEATURES:

- Plastic Protective Sleeve
- Thimble eyes for easy connection

#### SPECIFICATIONS:

Material:	PVC & Galvanized Steel Wire Rope
Weight:	214 g
Length:	60 cm
Standard:	SANS 50566   SANS50354
Breaking Strength:	22 kN

## 120CM WIRE ROPE SLING



### HS3/002

#### DESCRIPTION

The 120 cm Wire Rope Sling was designed for heavy duty anchoring around an object where the structure is very abrasive and could damage a Webbing type sling. This type of sling is very useful during Rope Access aid climbing type working situations. This sling comes complete with Protective Plastic Sleeve and thimble eyes for easy connection.

#### PRODUCT FEATURES:

- Plastic Protective Sleeve
- Thimble eyes for easy connection

#### SPECIFICATIONS:

Material:	PVC & Galvanized Steel Wire Rope
Weight:	316 g
Length:	120 cm
Standard:	SANS 50566   SANS50354
Breaking Strength:	22 kN



## 2M OPEN ROUND SLING



### HS4/001

#### DESCRIPTION

The padded 2m Open Round Sling was designed to set up an anchor point around a wooden type electrical power line structure. The length of the sling makes it easier to create a friction anchor point around the structure by using a prussic type knot. The outer padded sleeve protects the sling from the abrasive surface of the structure.

#### PRODUCT FEATURES:

- Long, so easy to use
- Light weight
- Protective cover

#### SPECIFICATIONS:

Material:	Polypropylene Webbing
Weight:	464 g
Length:	200 cm
Standard:	SANS 50566
Breaking Strength:	22 kN

## PICK-OFF SLING



### HS5/001

#### DESCRIPTION

The Pick-Off Sling was designed for easy connection to a victim during post Fall Arrest type rescues. The sling is fully adjustable and makes it easier to pull the victim closer to the rescuer during the rescue. The locking mechanism on the buckle of the strap will keep the victim close to the rescuer.

#### PRODUCT FEATURES:

- Fully adjustable
- Locking buckle
- Protective cover

#### SPECIFICATIONS:

Material:	Polypropylene Webbing
Weight:	464 g
Length:	150 cm
Standard:	SANS 50566
Breaking Strength:	22 kN

## HEIGHT SAFE 360™

## SLING SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
<b>60CM OPEN ROUND SLING</b>				
<b>HS1/001</b>				
	SANS 50566	Tubular Polypropylene Webbing	Breaking Strength: 22 kN	70 g
<b>120CM OPEN ROUND SLING</b>				
<b>HS1/002</b>				
	SANS 50566	Tubular Polypropylene Webbing	Breaking Strength: 22 kN	140 g
<b>1.5M ANCHOR STRAP</b>				
<b>HS2/001</b>				
	SANS 50566 SANS50354	PVC & Polypropylene Webbing	Breaking Strength: 22 kN	490 g
<b>0.5M ANCHOR STRAP</b>				
<b>HS2/002</b>				
	SANS 50566 SANS50354	PVC & Polypropylene Webbing	Breaking Strength: 22 kN	240 g
<b>60CM WIRE ROPE SLING</b>				
<b>HS3/001</b>				
	SANS 50566 SANS50354	PVC & Galvanized Steel Wire Rope	Breaking Strength: 22 kN	214 g
<b>120CM WIRE ROPE SLING</b>				
<b>HS3/002</b>				
	SANS 50566 SANS50354	PVC & Galvanized Steel Wire Rope	Breaking Strength: 22 kN	316 g
<b>2M OPEN ROUND SLING</b>				
<b>HS4/001</b>				
	SANS 50566	Polypropylene Webbing	Breaking Strength: 22 kN	464 g
<b>PICKOFF SLING</b>				
<b>HS5/001</b>				
	SANS 50566	Polypropylene Webbing	Breaking Strength: 22 kN	464 g




# 360


heightsafe

TRAINING • GEAR • PROJECTS

# CONNECTERS

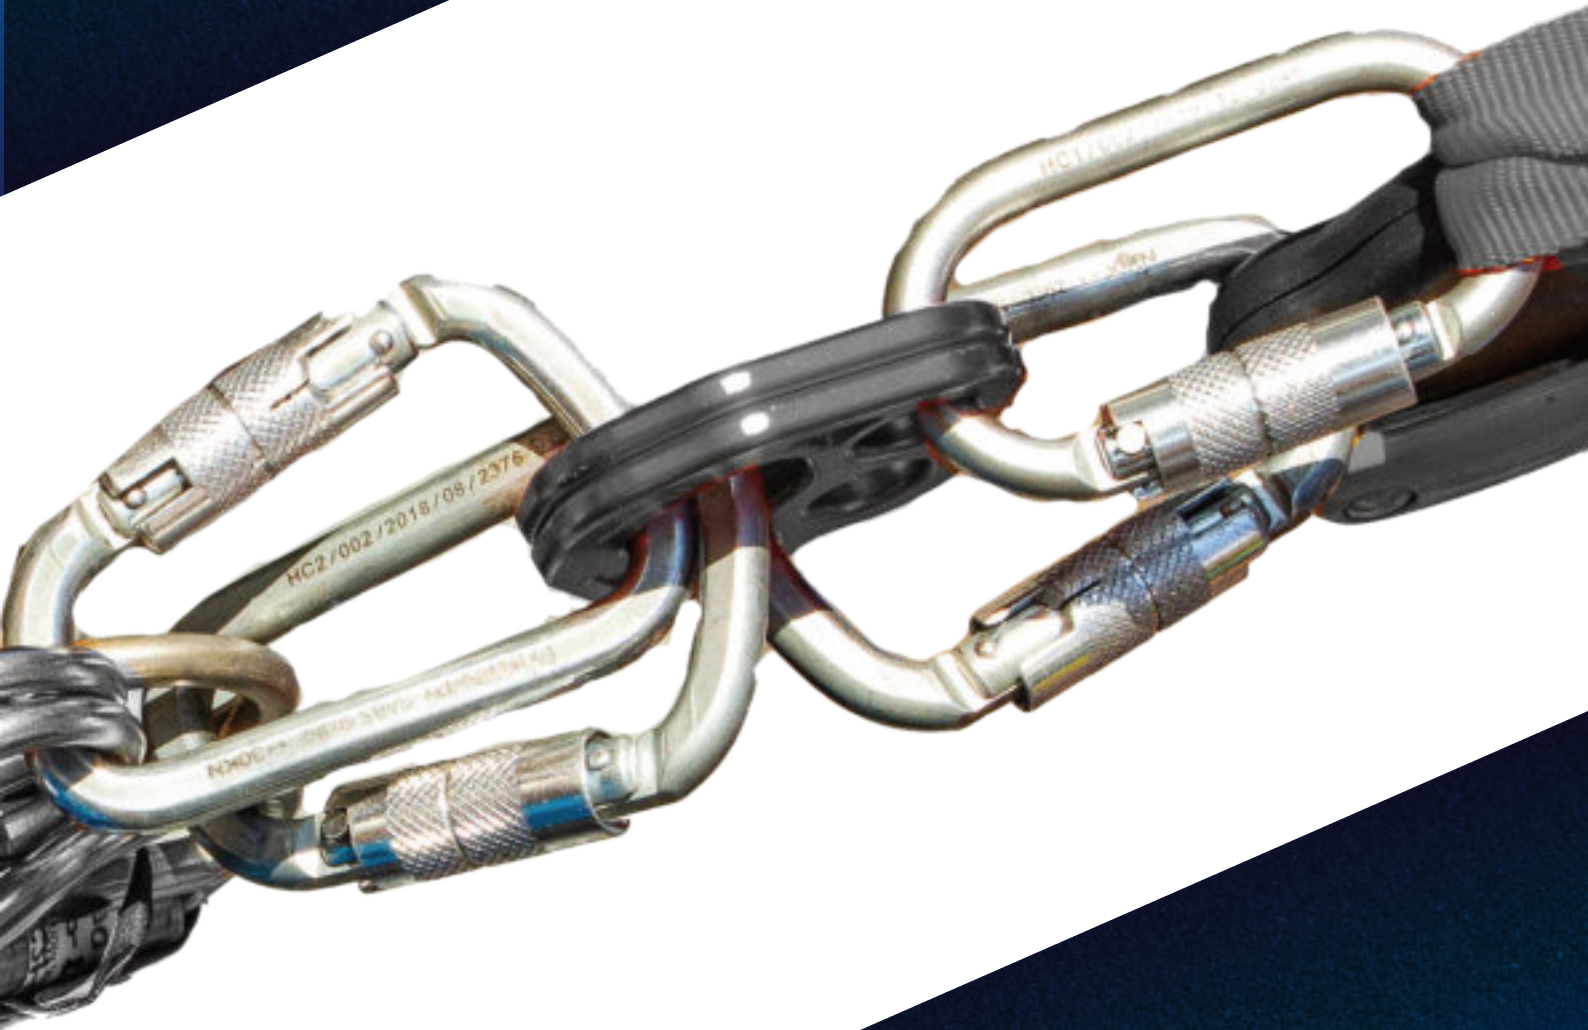

Our connectors are used to connect or link various components of a Fall Arrest, Rope Access or Rope Rescue system together.





## OVAL SCREW-GATE KARABINER HC1/001

### DESCRIPTION

The Oval Twist-Lock Karabiner is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The shape of the Karabiner is designed to avoid cross-loading where there is a lot of movement on the device that it is connected to. The twist self-locking function reduces the risk of a potential open connector or operator negligence.

### PRODUCT FEATURES:

- Oval shape
- Screw gate locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	170 g
Dimensions:	60 mm x 110 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	22 kN

## OVAL TWIST-LOCK KARABINER HC1/002

### DESCRIPTION

The Oval Screw-Gate Karabiner is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The shape of the Karabiner is designed to avoid cross-loading where there is a lot of movement on the device that it is connected to. The locking function is a manual screw type mechanism.

### PRODUCT FEATURES:

- Oval shape
- Twist self-locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	176 g
Dimensions:	60 mm x 110 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	22 kN



## D-SHAPE SCREW GATE KARABINER HC2/001

### DESCRIPTION

The D-Shape Screw-Gate Karabiner is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The D-Shape guarantees a stronger connector as the spine is in line with the applied load. The locking function is a manual screw type mechanism.

### PRODUCT FEATURES:

- D-Shape
- Screw gate locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	216 g
Dimensions:	70 mm x 110 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	25 kN







## D-SHAPE TWIST-LOCK KARABINER

**HC2/002**

### DESCRIPTION

The D-Shape twist-lock Karabiner is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The D-Shape guarantees a stronger connector as the spine is in line with the load applied. The twist self-locking function reduces the risk of a potential open connector or operator negligence.

### PRODUCT FEATURES:

- D-Shape
- Twist self-locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	216 g
Dimensions:	70 mm x 110 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	25 kN

## OVAL MAILLON LONG 7MM

**HC4/001**

### DESCRIPTION

The 7 mm oval Maillon is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The shape reduces cross loading where there is a lot of movement. The locking mechanism reduces the risk of breaking during potential cross loading. The size and shape of this Maillon makes it ideal to connect the Tape Ladder to the Handle Ascender.

### PRODUCT FEATURES:

- Small oval shape
- Screw locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	74 g
Dimensions:	55 mm x 30 mm x 7 mm
Standard:	SANS 50362
Breaking Strength:	22 kN

## OVAL MAILLON SHORT 10MM

**HC4/002**

### DESCRIPTION

The 10 mm oval Maillon is used to connect various parts and components together in a Fall Arrest or Rope Access working system. The shape reduces cross loading where there is a lot of movement. The locking mechanism reduces the risk of breaking during potential cross loading. This specific Maillon is ideal for connecting the Shock Absorbing Lanyard to the harness dorsal attachment point.

### PRODUCT FEATURES:

- Oval shape
- Screw locking function

### SPECIFICATIONS:

Material:	Plated Steel
Weight:	157 g
Dimensions:	76 mm x 35 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	22 kN



## DELTA MAILLON 8MM



### HC5/001

#### DESCRIPTION

The 8 mm Delta Maillon is used to connect various parts and components together in a Fall Arrest or Rope Access working system. This connector is very useful to keep various items in a specific direction. The locking mechanism will not open in the event of a cross load. This specific shape and design is ideal for connecting the bottom part of the chest ascender to the Rope Access Harness.

#### PRODUCT FEATURES:

- Delta triangular shape
- Screw locking function

#### SPECIFICATIONS:

Material:	Plated Steel
Weight:	84 g
Dimensions:	65 mm x 80 mm x 8 mm
Standard:	SANS 50362
Breaking Strength:	22 kN

## DELTA MAILLON 10MM



### HC5/002

#### DESCRIPTION

The 10 mm Delta Maillon is used to connect various parts and components together in a Fall Arrest or Rope Access working system. This connector is very useful to keep various items in a specific direction. The locking mechanism will not open in the event of a cross load. This specific size and shape of the Maillon is ideal for connecting the front section of the Rope Access harness.

#### PRODUCT FEATURES:

- Delta triangular shape
- Screw locking function

#### SPECIFICATIONS:

Material:	Plated Steel
Weight:	165 g
Dimensions:	85 mm x 65 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	22 kN

## DEMI-ROND MAILLON 10MM



### HC6/001

#### DESCRIPTION

The 10 mm Demi-Rond Maillon is used to connect various parts and components together in a Fall Arrest or Rope Access working system. This connector is very useful to keep various items in a specific direction. The locking mechanism will not open in the event of a cross load. This specific shape is ideal for connecting the top section of a chest ascender to the Rope Access harness.

#### PRODUCT FEATURES:

- D-round shape
- Screw locking function

#### SPECIFICATIONS:

Material:	Plated Steel
Weight:	165 g
Dimensions:	85 mm x 65 mm x 10 mm
Standard:	SANS 50362
Breaking Strength:	22 kN



## KONG FROG QUICK CONNECTOR

**HC10/001**

### DESCRIPTION

The Kong Frog Connectors makes difficult connections quick and easy. The upper connector employs a self-closing mechanism eliminating the necessity to clip two Karabiners together. Used in rescue situations as a fast connection point to the victim.

### PRODUCT FEATURES:

- Quick Clip function
- Auto Locking Function

### SPECIFICATIONS:

Material:	Alloy
Weight:	74 g
Length:	180 mm
Standard:	SANS 50362
Breaking Strength:	22 kN



## HEIGHT SAFE 360™

### Connector Specification sheet

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

## OVAL SCREW GATE KARABINER

### HC1/001



SANS 50362

Plated Steel

Breaking Strength: 22kN

170g

## OVAL TWIST LOCK KARABINER

### HC1/002



SANS 50362

Plated Steel

Breaking Strength: 22kN

176g

## D SHAPE SCREW GATE KARABINER

### HC2/001



SANS 50362

Plated Steel

Breaking Strength: 25kN

216g

## D SHAPE TWIST LOCK KARABINER

### HC2/002



SANS 50362

Plated Steel

Breaking Strength: 25kN

216g

## OVAL MAILLON LONG 7MM

### HC4/001



SANS 50362

Plated Steel

Breaking Strength: 22kN

74g

## OVAL MAILLON SHORT 10MM

### HC4/002



SANS 50362

Plated Steel

Breaking Strength: 22kN

157g

## DELTA MAILLON 8MM

### HC5/001



SANS 50362

Plated Steel

Breaking Strength: 22kN

84g

## DELTA MAILLON 10MM

### HC5/002



SANS 50362

Plated Steel

Breaking Strength: 22kN

165g

## DEMI ROND MAILLON 10MM

### HC6/001



SANS 50362

Plated Steel

Breaking Strength: 22kN

165g

## KONG FROG QUICK CONNECTOR

### HC10/001



SANS 50362

Alloy

Breaking Strength: 22kN

74g



# 360 HELMETS

heightsafe  
TRAINING • GEAR • PROJECTS



All Helmets distributed by Height Safe 360 Gear have been tried and tested by our own Rope Access project teams for durability, comfort and versatility.





## NIKKI INDUSTRIAL HELMET

### HM1/001

#### DESCRIPTION


The Niki Industrial Helmet offers head protection with added high electrical insulation and strength. This product is manufactured from an ABS plastic which offers excellent protection and rigidity. Air vents can be opened and closed at the top of the Helmet with the turn of a hand. Ultra-violet inhibitor protects and extends the life of the Helmet.

#### PRODUCT FEATURES:

- Durable
- Ventilation holes
- Electrical insulation
- Ultra violet protection
- Anti-glare peak
- Advanced breathable sweatband

#### SPECIFICATIONS:

Material:	ABS Plastic
Weight:	404 g
Dimensions:	50 cm to 64 cm head sizes
Standard:	SANS 1397
Breaking Strength:	5 kN



## UVEX PHEOS

### HM6/002/COMP

#### DESCRIPTION



The lightweight Uvex Pheos safety Helmet in a sporty design offers maximum comfort with its ventilation ports and adjustable 3D interior fittings. The robust, rigid safety Helmet shell maintains its shape even under lateral pressure – and fulfills the safety requirements in any work at height situation. Its functional accessory system ensures that the Uvex Pheos ear muffs or a torch can easily be fitted and removed when required.

#### PRODUCT FEATURES:

- Constant ventilation
- Helmet shell fully closed at front end, permanently open at rear end for increased ventilation
- Optimal fit, high wearing comfort
- 6-point textile suspension
- Approved and labelled for use in temperatures as low as -30° C
- Adapter systems for Uvex visors, Uvex ear muffs and lamps with Helmet
- Clips for attaching extras with elastic band, e.g. wide vision goggles and LED climbing Helmet torch

#### SPECIFICATIONS:

Material:	ABS plastic
Weight:	460 g
Dimensions:	Suitable for head sizes of 51-61 cm
Standard:	EN 397 and EN 12492
Breaking Strength:	5 kN





## UVEX PHEOS ALPINE

## HM6/001

### DESCRIPTION



The lightweight Uvex Pheos. Alpine safety Helmet offers maximum comfort with its ventilated ports and adjustable 3D interior fittings. The robust, rigid safety Helmet shell maintains its shape even under lateral pressure which makes it excellent for all types of Rope Access work. Its functional accessory system ensures that the Uvex Pheos ear muffs or a torch can be easily fitted and removed when required.

### PRODUCT FEATURES:

- Constant ventilation
- Helmet shell fully closed at front end, permanently open at rear end for increased ventilation
- Optimal fit, high wearing comfort
- 6-point textile suspension
- Approved and labelled for use in temperatures as low as  $-30^{\circ}\text{C}$
- Adapter systems for Uvex visors, Uvex earmuffs and lamps with Helmet
- Clips for attaching extras with elastic band, e.g. wide vision goggles and LED climbing Helmet torch

### SPECIFICATIONS:

Material:	ABS plastic
Weight:	460 g
Dimensions:	suitable for head sizes of 51-61 cm
Standard:	EN 397 and EN 12492





**HEIGHT SAFE 360™****HELMETS SPECIFICATION SHEET**

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

**NIKKI INDUSTRIAL HELMET****HM1/001**

SANS 1397

ABS Plastic

N/A

404 g

**UVEX PHEOS****HM6/002/COMP**

EN 397 and EN 12492

ABS Plastic

N/A

460g

**UVEX PHEOS ALPINE****HM6/001**

EN 397 and EN 12492

ABS Plastic

N/A

404 g

# 360


heightsafe

TRAINING • GEAR • PROJECTS

# DESCENDERS



All descenders distributed by Height Safe 360 Gear are world renowned for being durable and user-friendly, no matter what your safe working at height access requirements.





## ANTHRON LORY DESCENDER

**HD2/001**

### DESCRIPTION

The Lory is a robust multi-purpose device for use in industrial Rope Access applications. Its functionality, spans the range from Rope Access, Fall Arrest and rescue descender device through semiautomatic belay device to rope positioning and retention device for use on roofs and edges. By pulling the handle the cam gradually releases the rope. If the handle is pulled down to its terminal position the double-stop function is triggered which blocks the rope again. To resume descending, return the handle to closed position and restart the process.

### PRODUCT FEATURES:

- Compact, lightweight, durable
- Easy to open and close
- Double stop safety
- Easy operating mechanism

### SPECIFICATIONS:

Material:	Alloy steel
Weight:	360 g
Rope Compatibility:	10.5 mm – 11 mm
Standard:	EN 358, EN 341 Type A, EN 12841 Type C, EN 15151-1 Type 8

## PETZL I'D DESCENDER S/L

**HD1/002**

### DESCRIPTION

The Petzl I'D is a self-braking descender with anti-panic function. The multi-function handle allows for controlled descent and easier movement on inclined or horizontal terrain. There is no need to tie off the device at the work station. The anti-panic function only activates if the user pulls too hard on the operating handle. The I'D descender has an anti-error catch to reduce the chance of an accident, and a gate that helps prevent dropping the device and also facilitates rope installation when passing intermediate anchors.

### PRODUCT FEATURES

- Multi-function handle
- Anti-panic function
- Anti-error catch
- Device can be rapidly installed or removed from the rope without disconnecting it from the harness

### SPECIFICATIONS:

Material:	Aluminium Alloy and Plastic
Weight:	530 g
Dimensions:	Rope Compatibility: 10 mm – 11.5 mm Rope
Standard:	EN 341 Type A
Safe Working Load:	100 kg





## PETZL STOP DESCENDER



### HD1/001

#### DESCRIPTION

The Petzl Stop is a device that is used by a more experienced Rope Access Technician for the use of descending during Rope Access Operations.

#### PRODUCT FEATURES

- Self-braking function allows you to easily stop and hold your position on the rope
- Device can be rapidly installed or removed from the rope without disconnecting it from the harness
- May also be used to ascend short distances with the addition of a Handle Ascender connected to a tape ladder

#### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	326 g
Rope Compatibility:	9 mm to 12 mm Diameter
Standard:	EN 341 Type A
Safe Working Load:	100 kg

## SINING ROCK RESCUE FIGURE 8



### HD4/001

#### DESCRIPTION

Special Figure Eight designed for fast abseiling during rescue rappelling or tactical intervention.

#### PRODUCT FEATURES

- Wide range of rope diameters
- Effective heat distribution

#### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	154 g
Dimensions:	13 mm x 110 mm x 150 mm
Rope Compatibility:	8 mm – 13 mm
Standard:	EN 15151-2
Breaking Strength:	40 kN

## SPARROW 200R



### HD2/002

#### DESCRIPTION

A self-braking descender for rope work, the evolution of the SPARROW 200 descender has been developed for high workloads. It allows the operator to lower themselves on the working line, to position themselves on the working line and to ascend the same rope. It is ideal in the event of an assisted lowering of two people with the device installed at the anchor (the operator lowers the rescuer and the person being rescued) or for the simultaneous lowering of two people (rescuer lowers themselves with the injured person).

#### PRODUCT FEATURES

- Equipped with a safety lever on the movable flange that facilitates the insertion of the rope in the transition of the friction.
- A multifunctional command lever with an automatic recall system that allows the operator to descend at a controlled speed and stop the descent at the desired point without the need to take off the device.

#### SPECIFICATIONS:

Material:	Aluminium Alloy
Rope Compatibility:	11 mm
Standard:	EN 12841-2006   EN 341:2011
Safe working Load:	200 kN





## HEIGHT SAFE 360™

## DESCENDER SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

## ANTHRONY DESCENDER

## HD2/001



EN 358  
EN 341 Type A  
EN 12841 Type C  
EN 15151-1 Type 8

Alloy Steel

120 kg

360 g

## SPARROW 200R

## HD2/002



EN 12841-2006 | EN 341:2011

Aluminium Alloy

200 kg

530 g

## SINING ROCK RESCUE FIGURE 8

## HD4/001



SANS 50567

Aluminium Alloy

100 kg

206 g

## PETZL ID DESCENDER S/L

## HD1/002



EN 341 Type A

Aluminium Alloy and Plastic

100 kg

530 g

## PETZL STOP DESCENDER

## HD1/001



EN 341 Type A

Aluminium Alloy

100 kg


326 g

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# ASCENDERS & ROPE GRABS

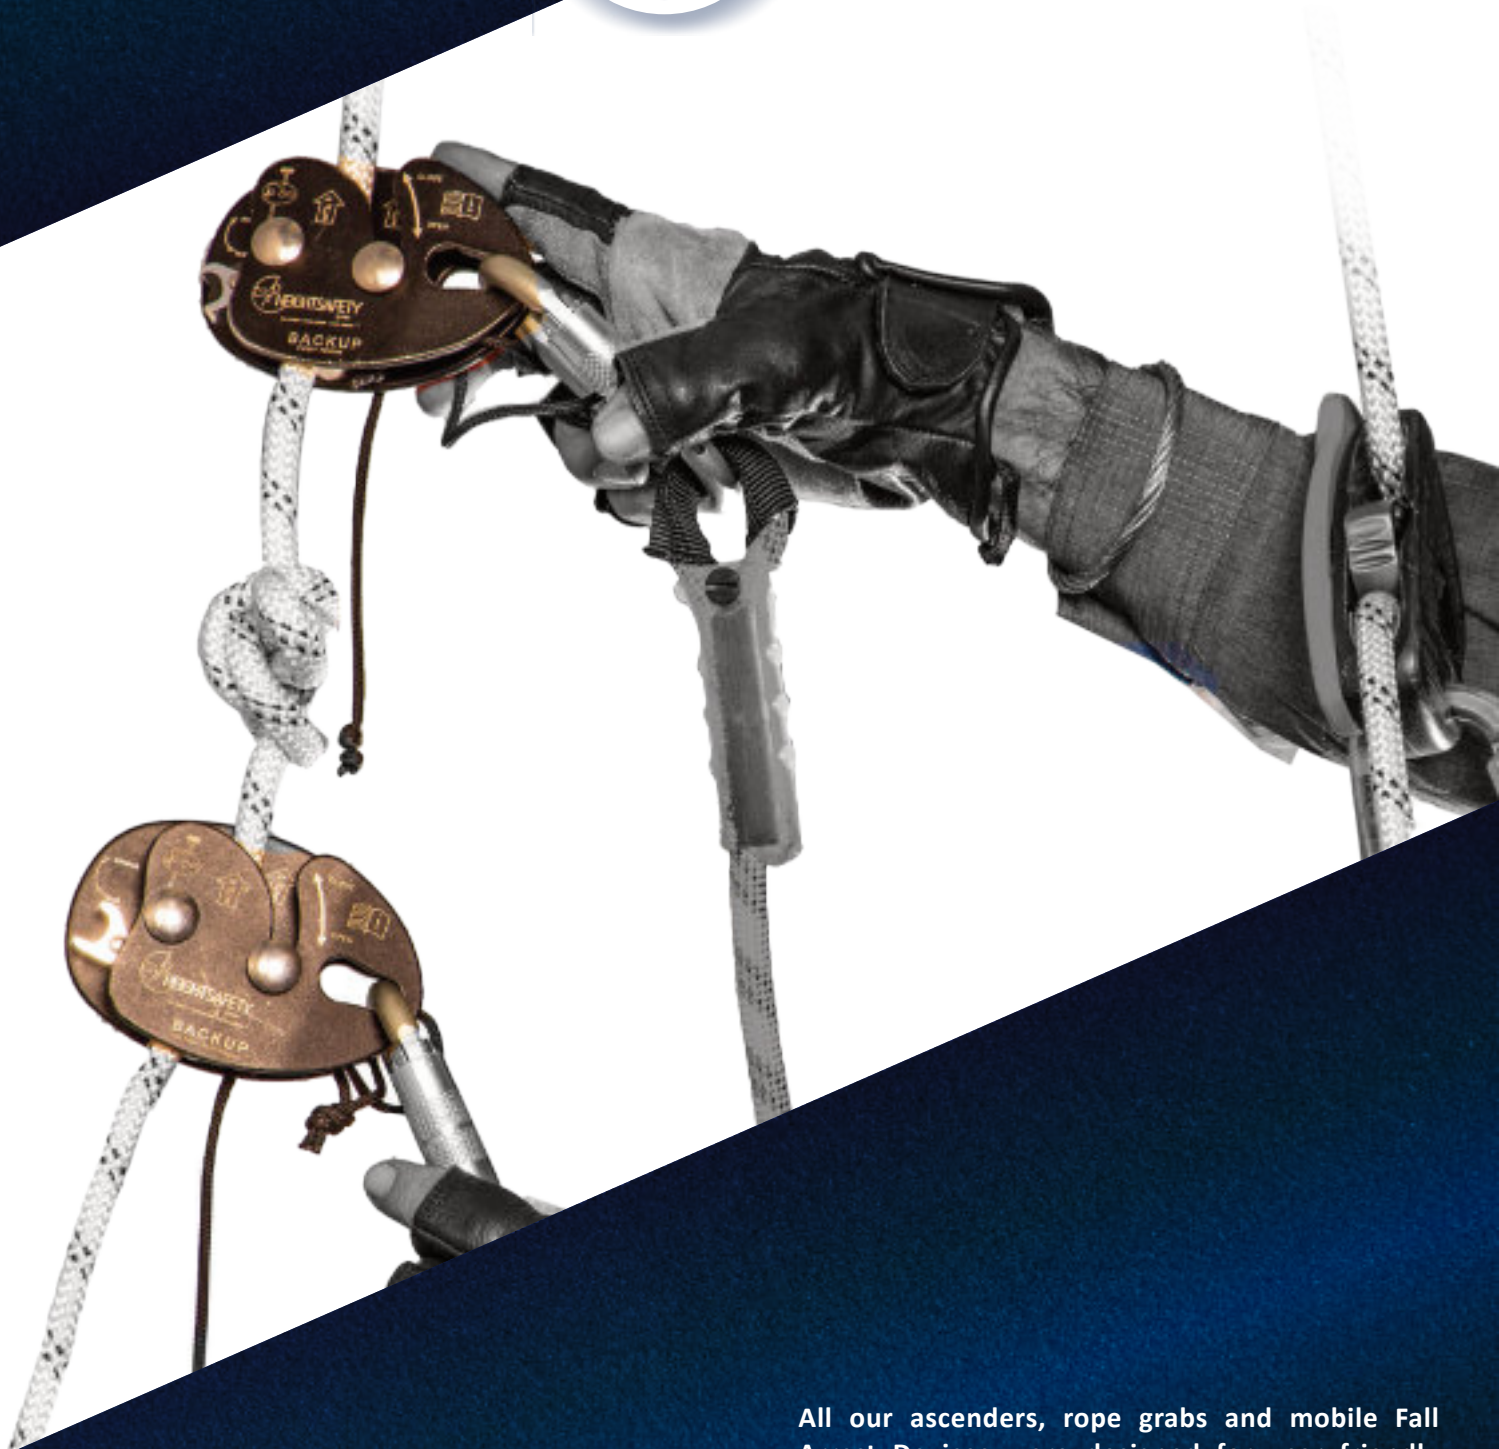

All our ascenders, rope grabs and mobile Fall Arrest Devices were designed for user friendly connection and application.







## HANDLE ASCENDER



### HG1/001

#### DESCRIPTION

The Handle Ascender is designed for mechanical rope ascending purposes and can be used for Fall Arrest, Rope Access and Rope Rescue purpose. It is usually used in conjunction with the 5 step Etrier and a Chest Ascender.

#### PRODUCT FEATURES

- Lightweight
- Durable
- Easy to fit and remove

#### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	206 g
Dimensions:	190 mm x 85 mm
Rope Compatibility:	8 mm – 13 mm
Standard:	SANS 50567
Safe Working Load:	100 kg

## CHEST ASCENDER



### HG1/002

#### DESCRIPTION

Used as a Chest Ascender in Rope Access and Rope Rescue ascending techniques. Normally fitted to the chest point on the harness and used in conjunction with a Handle Ascender.

#### PRODUCT FEATURES

- Lightweight
- Durable

#### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	136 g
Dimensions:	75 mm x 110 mm
Rope Compatibility:	8 mm – 13 mm
Standard:	SANS 50567
Safe Working Load:	100 kg



## BACKUP DEVICE

HG1/003



### DESCRIPTION

The Back - Up device was specifically designed as a mobile Fall Arrestor, for use in Rope Access, Fall Arrest and work positioning. This device will run freely up and down the rope until a sudden jerk will activate the stopping and locking mechanism. For Rope Access applications the device has a half lock capability that allows the device to be positioned where required. For work restraint and work positioning the device has a full lock function that will keep the device locked in one place.

### PRODUCT FEATURES

- The unlock/lock function makes it ideal for use in Rope Access and work positioning
- Swivel opening function to ensure ease of use inserting the rope
- Small lightweight design

### SPECIFICATIONS:

Material:	Aluminium and Steel Alloy
Weight:	296 g
Dimensions:	110 mm x 75 mm
Rope Compatibility:	10.5 mm – 11 mm
Standard:	SANS 50567
Safe Working Load:	150 kg

## ROPE GRAB

HG4/001



### DESCRIPTION

The Rope Grab is a heavy duty mechanical ascender specifically designed for hauling and complex pulley systems. The device is easy to open and close that allows hassle free rope feeding. The device will slide in one direction and will lock on the opposite direction.

### PRODUCT FEATURES

- Heavy duty design
- Lightweight
- Durable
- Easy to use

### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	258 g
Rope Compatibility:	10 mm – 12 mm
Standard:	SANS 50567
Safe Working Load:	150 kg



## HEIGHT SAFE 360™

## ASCENDER SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

### HANDLE ASCENDER

#### HG1/001



SANS 50567

Aluminium Alloy

100 kg

136 g

### CHEST ASCENDER

#### HG1/002



SANS 50567

Aluminium Alloy

100 kg

136 g

### BACKUP DEVICE

#### HG1/003



SANS 50567

Aluminium and Steel Alloy

150 kg

296 g

### ROPE GRAB

#### HG4/001



SANS 50567

Aluminium Alloy

150 kg

258g




# 360 PULLEYS

heightsafe

TRAINING • GEAR • PROJECTS



All our Pulleys are small, robust and easy to use for any technical manual lifting requirement.



## CLIMAX MINI PULLEY

HP1/001



### DESCRIPTION

This Pulley is designed for lightweight Hauling Systems and rescue situations. The small design makes it ideal for a personal hauling and lifting systems in technical Rope Access and Rope Rescue situations. Being small and light weight it is easy to keep the Pulley attached to the personal harness in case of a pick off type rescue lifting situation.

### PRODUCT FEATURES

- Lightweight
- Easy to use
- Durable

### SPECIFICATIONS:

Material:	Aluminium alloy
Weight:	112 g
Dimensions:	60 mm x 80 mm
Rope Compatibility:	10 mm – 12 mm
Standard:	EN 12278
Breaking Strength:	28 kN

## CLIMAX LARGE SINGLE PULLEY

HP1/003



### DESCRIPTION

This Pulley is designed for heavy duty, complex Pulley systems during Rope Access and Rope Rescue hauling situations. The larger wheel on the Pulley allows for smoother rope movement with less friction. The single wheel design allows for faster connection and converting between various mechanical advantages during hauling.

### PRODUCT FEATURES

- Lightweight
- Durable

### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	266 g
Dimensions:	115 mm x 8 mm
Rope Compatibility:	10 mm – 12 mm
Standard:	EN 12278
Breaking Strength:	32 kN

## CLIMAX TWIN PULLEY

HP1/002



### DESCRIPTION

This Double swivel Pulley designed for set mechanical advantages during general hauling where there is not a lot of converting between various types of Hauling System configurations.

### PRODUCT FEATURES

- Lightweight
- Compact
- Durable

### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	198 g
Dimensions:	105 mm x 60 mm
Rope Compatibility:	10 mm – 12 mm
Standard:	EN 12278
Breaking Strength:	28 kN





## 500KG SNATCH BLOCK



### HP2/001

#### DESCRIPTION

This Snatch Block is designed for heavy lifting up to 500 kg with the use of steel wire rope or industrial synthetic rope. This model has a bearing pulley to insure a smooth running action and can easily be opened for easy fitting of the Rope.

#### PRODUCT FEATURES

- Swivel hook-up point
- Open and close

#### SPECIFICATIONS:

Material:	Hardened mild steel
Weight:	2.9kg
Dimensions:	320mm x 110mm
Rope Compatibility:	8mm – 16mm
Standard:	SANS 1594
Breaking Strength:	500Kg

## 1000KG SNATCH BLOCK



### HP2/002

#### DESCRIPTION

This Snatch Block is designed for heavy lifting up to 1000 kg with the use of steel wire rope or industrial synthetic rope. This model has a bearing pulley to insure a smooth running action and can easily be opened for easy fitting of the Rope.

#### PRODUCT FEATURES

- Swivel hook-up point
- Open and close

#### SPECIFICATIONS:

Material:	Hardened Mild Steel
Weight:	5kg
Dimensions:	320mm x 110mm
Rope Compatibility:	8mm – 16mm
Standard:	SANS 1594
Breaking Strength:	1000Kg





## HEIGHT SAFE 360™

## PULLEYS SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

## CLIMAX MINI PULLEY

## HP1/001



EN 12278

Aluminium Alloy

Breaking Strength: 28kN

112 g

## CLIMAX LARGE SINGLE PULLEY

## HP1/003



EN 12278

Aluminium Alloy

Breaking Strength: 32kN

266 g

## CLIMAX TWIN PULLEY

## HP1/002



EN 12278

Aluminium Alloy

Breaking Strength: 28kN

198 g

## 500KG SNATCH BLOCK

## HP2/001



SANS 1594

Hardened Mild Steel

500 kg

2.9 kg

## 1000KG SNATCH BLOCK

## HP2/002



SANS 1594

Hardened Mild Steel

1000 kg

5 kg

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# RETRACTABLE



Height Safe 360 Gear distributes a range of Retractable Life Lines, Fall Arrest blocks. These devices will permit free up and down movement until a sudden fall will activate the braking mechanism.





## HEIGHT SAFE 360™

## RETRACTABLE LIFE LINE SPECIFICATION SHEET



## DESCRIPTION

Fall Arrest Block is a retractable Fall Arrest Life Line system designed to move vertically with the user's up and down movements and will lock in the event of a sudden jerk or stop. This system is ideal for Fall Arrest work with a lot of movement where overhead anchors are available.

## PRODUCT FEATURES

- Suitable for a one person load
- Quick action Fall Arrestor
- Easy to use
- Light weight

## SPECIFICATIONS:

Material:	Webbing
Weight:	2,5m = 1.508 kg, 6m = 2.064 kg, 10m = 4.8 kg, 15m = 6.6 kg, 20m = 8,6 kg
Standard:	EN 360
Safe Working Load:	100 kg



RETRACTABLE LIFE LINE 2m (WEBBING)  
HRL1/001



RETRACTABLE LIFE LINE 6 m (WEBBING)  
HRL1/004



RETRACTABLE LIFE LINE 10 m (CABLE)  
HRL1/005



RETRACTABLE LIFE LINE 15 m (CABLE)  
HRL1/006



RETRACTABLE LIFE LINE 20 m (CABLE)  
HRL1/007





## MAXI PROTECT RETRACTABLE LIFE LINE



### HRL2/001 | HRL2/002 | HRL2/003 | HRL2/004

#### DESCRIPTION

MAXIPROTECT Fall Arrest Retractable Lifelines/Inerť a Reels are designed to reduce veřĩ cal impact force on the body caused by falling from height. They are used to provide semi-permanent fall protecĩ on. The lifeline tension allows the used to move freely around the work area.

#### PRODUCT FEATURES

- Suitable for a one person load
- Triple pawl brake system with energy dissipaĩ ng mechanism
- Side cable exit for smooth operaĩ on and reduced cable wear
- Lightweight, compact and durable
- Supplied with pull down cord

#### SPECIFICATIONS:

- 150 kg capacity for operator and tools
- Conforms to EN 360:2002 (SANS 50360:2003)
- Minimum staĩ c strength 15kN
- High strength ABS (thermoplasĩ c) casing
- Top anchor point with built-in swivel limits lifeline twisĩ ng
- Buffer spring at cable exit protects block and allows for smooth operaĩ on
- Lower self-locking snap hook and swivel with built-in impact indicator for connecĩ ng directly to the safety harness

## TWIN FA WEBBING WITH SCAFFOLD HOOKS



### HRL5/002

#### DESCRIPTION

HARU TWIN Retractable Lifelines/Inerť a Reels are designed to reduce veřĩ cal impact force on the body caused by falling from height. They are used to provide semi-permanent fall protecĩ on. The lifeline tension allows the user to move freely around the work area.

#### PRODUCT FEATURES

- Suitable for a one-person load
- Triple pawl brake system with energy dissipaĩ ng mechanism
- Side cable exit for smooth operaĩ on and reduced cable wear
- Lightweight, compact and durable
- Built is a shock absorber.
- Supplied with pull-down cord

#### SPECIFICATIONS:

- 140 kg capacity for operator and tools
- Conforms to EN 360:2002
- Minimum staĩ c strength 12kN
- Nylon casing
- Top anchor point with built-in carabineer
- Cable stop at cable exit protects block and allows for smooth operaĩ on
- Lower self-locking snap hook and swivel with built-in impact indicator for connecĩ ng directly to the safety harness

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# ROPES



For the past 15 years Height Safe 360 has developed and perfected a range of durable low stretch kernmantle Rope. Manufactured and certified locally to SABS Standards, the Rope can be used in any Fall Arrest, Rope Access and Rope Rescue application.





## 11MM ALTUMAX ENDURO ACCESS **HR1/001**



### DESCRIPTION

This robust Access Rope is specifically designed for Fall Arrest, Rope Access and Rope Rescue purposes where the user requires a Rope that will have a longer life span. The fibers on the outside mantle, have been twisted and reverse twisted to increase the abrasion resistance on the Rope. The smaller pixels on the mantle also assist with the abrasion resistance and handling of the Rope.

### PRODUCT FEATURES

- Black / Orange / White colour
- Durable
- Low stretch kernmantle
- Higher abrasion resistance

### SPECIFICATIONS:

Material:	Nylon Polyester Combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51891
Breaking Strength:	35 kN

## 11MM ALTUMAX SLICK ACCESS **HR1/002**



### DESCRIPTION

This Rope is specifically designed for work sites with a high damage probability, like painting, grit blasting etc. The Slick Rope has bigger pixels on the outside mantle. This makes the Rope less abrasion resistant.

### PRODUCT FEATURES

- Black / Orange colour
- Durable
- Low stretch kernmantle
- Higher abrasion resistance

### SPECIFICATIONS:

Material:	Nylon polyester combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51981
Breaking Strength:	30 kN

## 11MM ALTUMAX SLICK TACTICAL **HR1/003**



### DESCRIPTION

This Rope has the same design and features as the Slicks Access Rope but only varies in colour. This Rope is specifically designed for tactical work with a high damage probability. The Slick Rope has bigger pixels on the outside mantle. This makes the Rope less abrasion resistant.

### PRODUCT FEATURES

- Black / White colour
- Durable
- Low stretch kernmantle
- Locally manufactured

### SPECIFICATIONS:

Material:	Nylon polyester combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51981
Breaking Strength:	30 kN



## 11MM ALTUMAX ENDURO ACCESS **HR1/001**



### DESCRIPTION

This robust Access Rope is specifically designed for Fall Arrest, Rope Access and Rope Rescue purposes where the user requires a Rope that will have a longer life span. The fibers on the outside mantle, have been twisted and reverse twisted to increase the abrasion resistance on the Rope. The smaller pixels on the mantle also assist with the abrasion resistance and handling of the Rope.

### PRODUCT FEATURES

- Black / Orange / White colour
- Durable
- Low stretch kernmantle
- Higher abrasion resistance

### SPECIFICATIONS:

Material:	Nylon Polyester Combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51891
Breaking Strength:	35 kN

## 11MM ALTUMAX SLICK ACCESS **HR1/002**



### DESCRIPTION

This Rope is specifically designed for work sites with a high damage probability, like painting, grit blasting etc. The Slick Rope has bigger pixels on the outside mantle. This makes the Rope less abrasion resistant.

### PRODUCT FEATURES

- Black / Orange colour
- Durable
- Low stretch kernmantle
- Higher abrasion resistance

### SPECIFICATIONS:

Material:	Nylon polyester combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51981
Breaking Strength:	30 kN

## 11MM ALTUMAX SLICK TACTICAL **HR1/003**



### DESCRIPTION

This Rope has the same design and features as the Slicks Access Rope but only varies in colour. This Rope is specifically designed for tactical work with a high damage probability. The Slick Rope has bigger pixels on the outside mantle. This makes the Rope less abrasion resistant.

### PRODUCT FEATURES

- Black / White colour
- Durable
- Low stretch kernmantle
- Locally manufactured

### SPECIFICATIONS:

Material:	Nylon polyester combination
Weight:	85 g per meter
Rope diameter:	11 mm
Standard:	SANS 51981
Breaking Strength:	30 kN

## 5MM BLACK ACCESSORY CORD

HR4/001

### DESCRIPTION

Accessory Cord is best utilized to tie down accessories and small tools to avoid falls when working at height. The 5 mm cord can also be used as an ascender by tying a prussic knot onto a thicker diameter Rope.

### PRODUCT FEATURES

- Lightweight

### SPECIFICATIONS:

Material:	Polyester
Weight:	15 g per meter
Standard:	SANS 50564
Breaking Strength:	5 kN



### ALPINE COILING METHOD

The most common coiling method to be used for static and Dynamic Ropes is called the alpine coiling method. This is a very fast method to coil and be able to uncoil the Rope.



**NOTE:** Rope can be coiled in hands. Rope can be coiled around neck. Rope can also be coiled on the ground.



## HEIGHT SAFE 360™

## ROPE SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	BREAKING STRENGTH	WEIGHT
------	---------------------------	---------------	-------------------	--------

### 11MM ALTUMAX ENDURO ACCESS

#### HR1/001



SANS 51891	Polyester Combination	35kN	85g per meter
------------	-----------------------	------	---------------

### 11MM ALTUMAX SLICK ACCESS

#### HR1/002



SANS 51891	Nylon Polyester Combination	30kN	85g per meter
------------	-----------------------------	------	---------------

### 11MM ALTUMAX SLICK TACTICAL

#### HR1/003



SANS 51891	Nylon Polyester Combination	30kN	85g per meter
------------	-----------------------------	------	---------------

### 11MM ALTUMAX SLICK TACTICAL

#### HR1/004



SANS 51891	Polyester Combination	30kN	85g per meter
------------	-----------------------	------	---------------

### 13MM ALTUMAX RESCUE ROPE

#### HR2/001



SANS 51891	Polyester Combination	40kN	130g per meter
------------	-----------------------	------	----------------

### 10.5mm KERNMANTLED DYNAMIC

#### HR3/001



SANS 50892	Nylon 6	35kN	80g per meter
------------	---------	------	---------------

### 5MM BLACK ACCESSORY CORD

#### HR4/001



SANS 50564	Polyester	5kN	15g per meter
------------	-----------	-----	---------------



# 360

heightsafe

TRAINING • GEAR • PROJECTS

# BAGS & POUCHES



All our Bags were designed to make the storage and transportation of your safe working at height equipment more user friendly.





## MULTIPURPOSE TOOL POUCH SMALL HB1/001



### DESCRIPTION

Designed and manufactured to assist a technician to carry small, light tools and other such objects when working at height.

### PRODUCT FEATURES

- Side clip attachment to attach easily onto to the side of the harness
- Draw string to close the pouch while climbing to ensure that tools do not fall out

### SPECIFICATIONS:

Material:	PVC
Weight:	196 g
Dimensions:	270 mm (L) x 15 mm (H)
Standard:	Non-load Bearing

## GENERAL PURPOSE 50L BAG BLACK HB2/001



### DESCRIPTION

Black PVC Bag with shoulder strap designed to carry ropes or Fall Arrest Kit.

### PRODUCT FEATURES

- Double shoulder strap to carry on back while climbing
- Tie down hole at the base of the Bag to tie the rope through when using a life line

### SPECIFICATIONS:

Material:	PVC
Weight:	474 g
Dimensions:	450 mm (L) x 300 mm (H)
Standard:	Non-load Bearing

## GENERAL PURPOSE 50L BAG RED HB2/002



### DESCRIPTION

Red PVC Bag with shoulder strap designed to carry rescue equipment and or ropes.

### PRODUCT FEATURES

- Double shoulder strap to carry on back while climbing
- Tie down hole at the base of the Bag to tie the rope through when using a life line

### SPECIFICATIONS:

Material:	PVC
Weight:	474 g
Dimensions:	450 mm (L) x 300 mm (H)
Standard:	Non-load Bearing





## KIT BAG LARGER



### HB3/001

#### DESCRIPTION

Strong PVC Kit Bag with zipper for carrying larger kits, like the Rope Access or rigging kits.

#### PRODUCT FEATURES

- Lockable zipper
- Side and top carry handles
- Durable

#### SPECIFICATIONS:

Material:	PVC
Weight:	912 g
Dimensions:	711 mm x 450 mm x 560 mm
Standard:	Non-load Bearing

## KIT BAG SMALL



### HB3/002

#### DESCRIPTION

Strong PVC Kit Bag with zipper for carrying smaller kits like the personal Rope Access or Fall Arrest Kits.

#### PRODUCT FEATURES

- Lockable zipper
- Side and top carry handles
- Durable

#### SPECIFICATIONS:

Material:	PVC
Weight:	592 g
Dimensions:	500 mm (L) x 300 mm (H)
Standard:	Non-load Bearing

## GENERAL PURPOSE 200M BAG BLACK



### HB2/004 | HB2/005

#### DESCRIPTION

Black PVC Bag with shoulder strap designed to carry ropes or Fall Arrest Kit.

#### PRODUCT FEATURES

- Double shoulder strap to carry on back while climbing
- Tie downhole at the base of the Bag to tie the rope through when using a lifeline

#### SPECIFICATIONS:

Material:	PVC
Weight:	500 g
Dimensions:	700 mm (L) x 300 mm (H)
Standard:	Non-load Bearing





## HEIGHT SAFE 360™

## BAGS & POUCHES SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	DIMENSIONS	WEIGHT
------	---------------------------	---------------	------------	--------

### MULTIPURPOSE TOOL POUCH SMALL HB1/001



Non-load Bearing

PVC

270mm (L) x 15mm (H)

196g

### GENERAL PURPOSE 50L BAG BLACK HB2/001



Non-load Bearing

PVC

450mm (L) x 300mm (H)

474g

### GENERAL PURPOSE 50L BAG RED HB2/002



Non-load Bearing

PVC

450mm (L) x 300 mm (H)

474g

### KIT BAG QARGER HB3/001



Non-load Bearing

PVC

711mm x 450mm  
x 560mm

912g

### KIT BAG QMALLR HB3/002



Non-load Bearing

PVC

500mm (L) x 300mm (H)

592g

### GENERAL PURPOSE 200M BAG BLACK HB3/002



Non-load Bearing

PVC

700mm (L) x 300mm (H)

500g

# 360

heightsafe

TRAINING GEAR PROJECTS

# ACCESSORIES



These products were developed as aiding tools to the current systems and products. They include safety glasses, etriers, gloves and headlamps.





## ROPE ACCESS SEAT ADVANCE

**HA9/002**

### DESCRIPTION

This Rope Access Seat will allow the individual Rope Access Technician to hang comfortably for long periods of time while performing Rope Access work. The seat design combined with the soÖ padding will also improve blood circulation and prevent suspension trauma.

### PRODUCT FEATURES

- Durable
- Comfortable
- Easy to use

### SPECIFICATIONS:

Material:	PVC and Webbing
Weight:	1.57 kg
Dimensions:	500 mm (L) x 50 mm (H)
Standard:	Non-load Bearing

## ROPE EDGE PROTECTOR

**HA7/001**

### DESCRIPTION

This Rope Edge Protector will assist in protecting the rope against sharp edges and surfaces during technical Rope Access or Rope Rescue situations. With this configuration, the rope is easily housed inside the protector. The Velcro strap allows the user to place and leave the protector, on the rope, in a specific area where rope protection is required. The additional Webbing layer on the inside of the protector offers enhanced protection against sharp, cutting edges.

### PRODUCT FEATURES

- Easy to move and shift the protector up and down.
- Light weight
- Durable
- Webbing loop to attach easily to a Lanyard to transport when climbing

### SPECIFICATIONS:


Material:	PVC & Polypropylene Webbing
Weight:	124 g
Dimensions:	590 mm
Standard:	Non-load Bearing







## 5 STEP ETRIER TAPE LADDERR

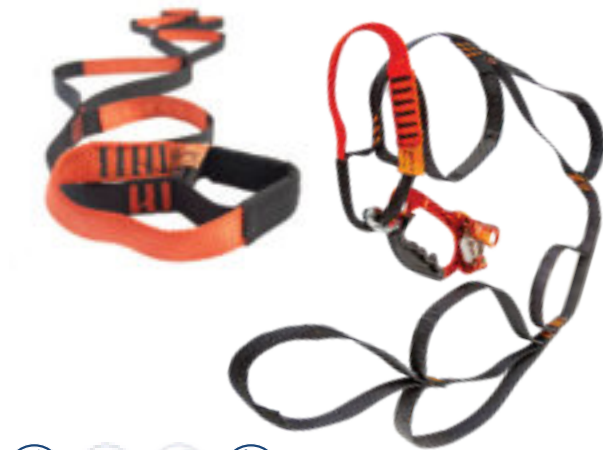**HA3/001**

### DESCRIPTION

A webbing-type tape ladder for the purposes of assisting the user to climb vertically in rope access or in rope rescue applications.

### PRODUCT FEATURES

- Easy to connect to handle type ascender
- Hand loop at the top connection point
- Double bottom stem to be able to use both feet next to each other

### SPECIFICATIONS:

Material:	Polypropylene Webbing
Weight:	252 g
Dimensions:	1800 mm (L) x 200 mm (H)
Standard:	N/A
Breaking Strength:	Non-load Bearing

## TRAUMASTEP

**HA3/002**

### DESCRIPTION

This device is a post Fall Arrest self-rescue loop. The Traumastep can be connected to any type of Harness as an add-on. Used in the event of a fall to place under the feet to elevate the Harness pressure on the arteries in an effort to prevent suspension trauma (orthostatic intolerance).

### PRODUCT FEATURES

- Disposable
- Clip on ends to connect to the side D-rings on the Harness
- Easily deployed
- Small and compact to carry (can fit into a tool pouch)

### SPECIFICATIONS:

Material:	Polypropylene Webbing
Weight:	172 g
Dimensions:	23 cm (folded), 1.75m (fully extended)
Standard:	N/A
Breaking Strength:	Non-load Bearing

## SNATCHER RATCHET

**HL10/001**

### DESCRIPTION

The Snatcher Ratchet Rescue system was specifically designed As a complete ready to use rescue system for post fall arrest rescue situations

### PRODUCT FEATURES

- Easy connection point at top and bottom
- Large Ratchet
- Double bottom stem to be able to use both feet next to each other

### SPECIFICATIONS:

Material:	Orange 50mm 5ton Webbing, PVC & Metal
Weight:	1.4 kg
Length:	70cm to 175cm
Safe Working Load:	120 kg



## CHIN STRAP

**HA2/001**


### DESCRIPTION

Designed to attach to the Nikki/Uvex Helmet to be fastened under the person's chin to keep the Helmet on the person's head.

### PRODUCT FEATURES

- 4 point attachment that attaches to the inner cradle of the helmet.
- Durable clip buckle for easy assembly

### SPECIFICATIONS:

Material:	Polypropylene Webbing
Weight:	26 g
Dimensions:	10 mm wide x 300 m

## RIGGING PLATE SMALL

**HA4/001**


### DESCRIPTION

This Rigging Plate will assist in organizing and managing a hauling and Lowering System. The four-hole connection on the plate makes it ideal for anchoring and connecting various devices for lifting and lowering purposes.

### PRODUCT FEATURES

- Lightweight
- Connection points large enough to fit a standard size Karabiner with ease
- 4 connection holes

### SPECIFICATIONS:

Material:	Aluminium Alloy
Weight:	64 g
Dimensions:	90 mm x 5 mm
Standard:	N/A
Safe Working Load:	150 kg

## RESCUE SCISSOR

**HA16/001**


### DESCRIPTION

The rescue scissors are a must-have tool for any rescue situation where a victim needs to be cut away. With the well designed fiberglass-reinforced, 45 degrees handle minimum movement and maximum comfort will be supplied when using the rescue scissors. The fine serration on the blades will ensure a clean and non-slip cut.

### PRODUCT FEATURES

- Ergonomic handle, fiberglass reinforced
- Blades with fine serration for a clean- non-slip cut
- Tether/Lanyard hole.

### SPECIFICATIONS:

Material:	Fiberglass-Reinforced Nylon with Stainless Steel blades
Weight:	182 g
Dimensions:	130 mm x 160 mm
Standard:	Non-load Bearing



### 360 GRIPPY 3/4 GLOVES

#### HA13/001



#### DESCRIPTION

Made from quality leather with reinforced palm area to protect hands while climbing. Tips of the fingers are open to allow use of fingers, specifically for opening Karabiners, tying knots, etc.

#### PRODUCT FEATURES

- Loop makes them easy to put on
- Comfortable
- Durable
- Open fingers to assist the user with fine motor skill functions

#### SPECIFICATIONS:

Material:	Pig Skin
Weight:	126 g
Dimensions:	Available s – xl
Standard:	Non-load Bearing

### 360 GRIPPY FULL FINGER GLOVES

#### HA13/005



#### DESCRIPTION

Made from quality leather with reinforced palm area to protect the hands while climbing.

#### PRODUCT FEATURES

- Loop makes them easy to put on
- Comfortable
- Durable

#### SPECIFICATIONS:

Material:	Pig Skin
Weight:	142 g
Dimensions:	Available s – xl
Standard:	Non-load Bearing

### 360 GRIPPY GOAT SKIN GLOVES

#### HA13/002



#### DESCRIPTION

Made from quality goat skin leather with reinforced palm area to protect the hands while climbing.

#### PRODUCT FEATURES

- Comfortable
- Abrasion resistant

#### SPECIFICATIONS:

Material:	Goat Skin
Weight:	S = 72 g, M = 75 g, L = 80 g, XL = 85 g
Standard:	Non-load Bearing





## UVEX PHOES SAFETY GLASSES

**HA1/001**

### DESCRIPTION

Protective Eyewear

### PRODUCT FEATURES

- Comfortable
- Duo spherical lenses provides excellent all round vision
- Slim temple geometry enables comfortable wearing of earmuffs, Helmets and caps
- Outstanding ventilation ensures a well eye climate
- Temple ends with non-slip components

### SPECIFICATIONS:

Material:	POM/TPE
Weight:	30 g
Standard:	EN 166 and EN 170

## UVEX PHOES SAFETY GLASSES HEADBAND

**HA1/002/02**

### DESCRIPTION

Elasticated, adjustable band designed to connect to the side of the UVEX Safety Glasses.

### PRODUCT FEATURES

- Adjustable strap
- Product Code: Adjustable to the UVEX Pheos Helmets

### SPECIFICATIONS:

Material:	Elastic
Weight:	10 g
Dimensions:	Stretchy
Standard:	Non-load Bearing



## ROPE STITCH

HA7/001



### DESCRIPTION



The rope sleeve and stitch were developed to decrease the amount of knots used in rope access and fall arrest applications. This method removes risk from the user and increases their efficiency by reducing the time used to check and remake knots used in different areas and applications. This method also prevents the rope from being removed from a system ensuring that all the components of a kit remain intact.

### PRODUCT USAGE:

- Rope Access Harness Complete
- Temp Vertical
- Rope if requested
- The adjustable anchor line

### SPECIFICATIONS:

Material: 25mm Black Tubular Webbing  
Rope off-cuts  
Black Thread  
Plastic Sleeve

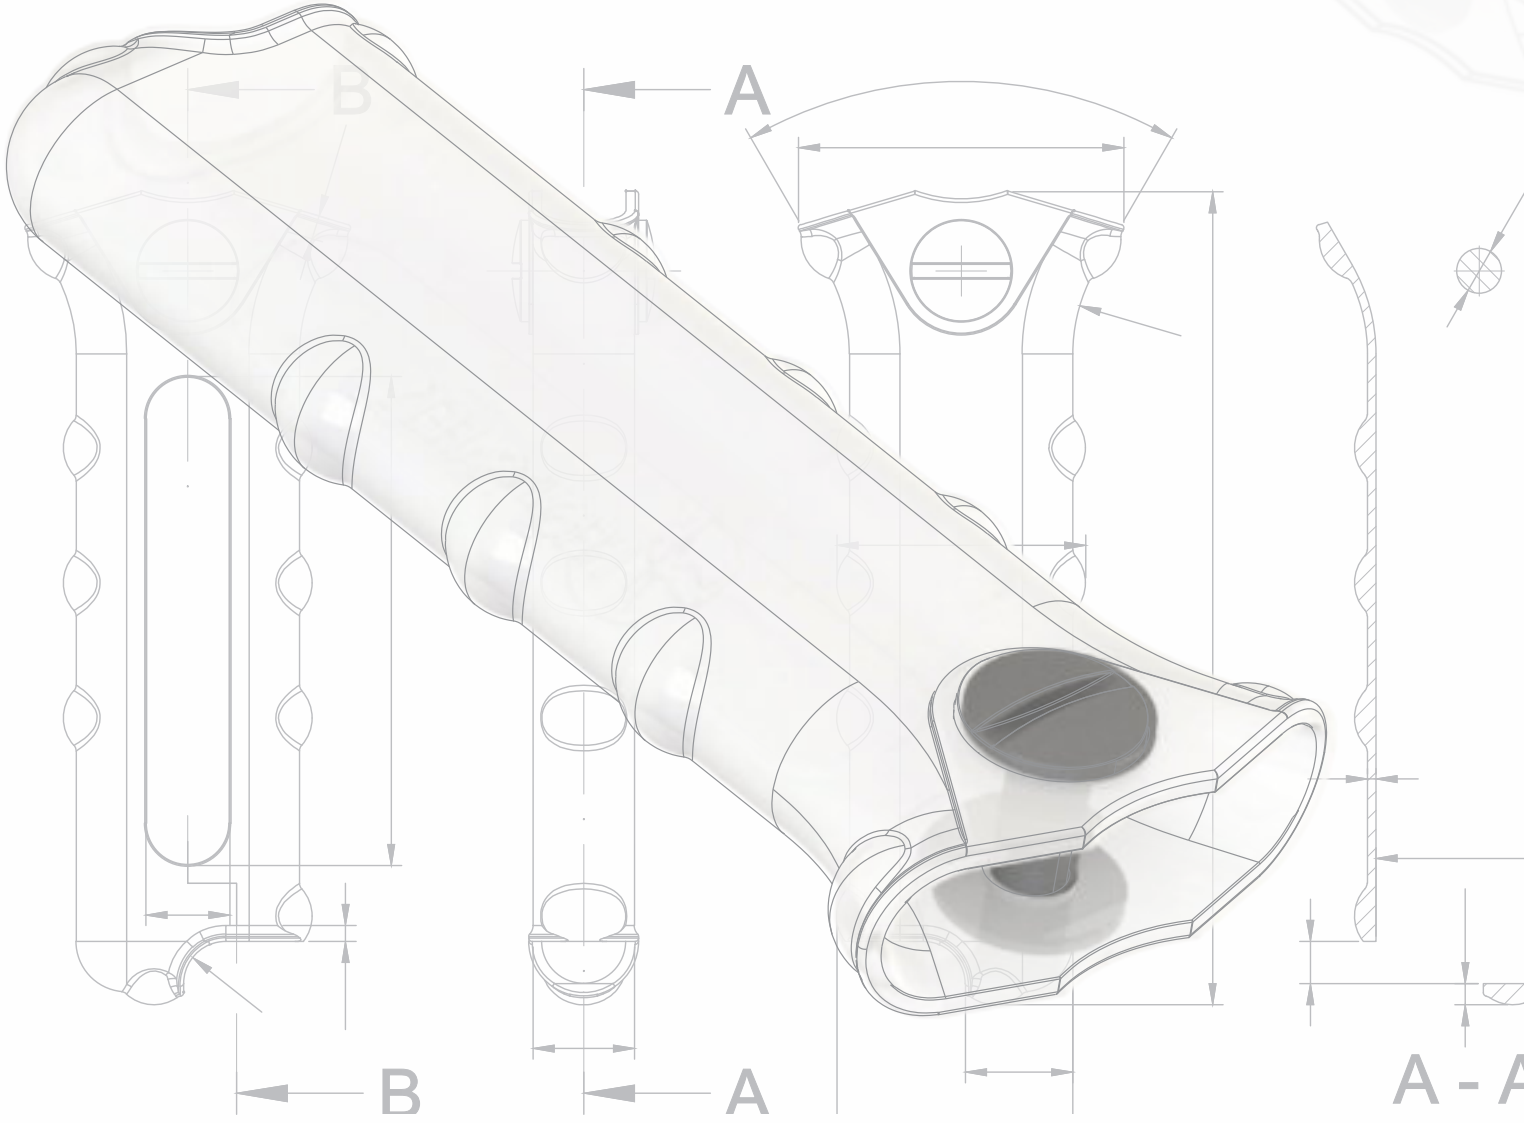

**HEIGHT SAFE 360™****ACCESSORIES SPECIFICATION SHEET**

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

**UVEX PHOES SAFETY GLASSES****HA1/001**

EN 166 and EN 170

POM/TPE

N/A

30g

**UVEX PHOES SAFETY GLASSES  
HEADBAND****HA1/002/02**

Non-load Bearing

Elař c

N/A

10g

**CHIN STRAP****HA2/001**

Non-load Bearing

Polypropylene Webbing

Dimensions:  
10mm wide x 300mm

26g

**5 STEP ETRIER TAPE LADDERR****HA3/001**

N/A

Polypropylene Webbing

Breaking Strength:  
Non-load Bearing

252g

**TRAUMASTEP****HA3/002**

N/A

Polypropylene Webbing

N/A

172g

**RIGGING PLATE SMALL****HA4/001**

N/A

Aluminium Alloy

200kg

64g

**ROPE EDGE PROTECTOR****HA7/001**

Non-load Bearing

PVC & Polypropylene  
Webbing

Dimensions: 590mm

124g





## HEIGHT SAFE 360™

## ACCESSORIES SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

### ROPE ACCESS SEAT ADVANCE

#### HA9/002



Non-load Bearing

PVC and Webbing

500mm (L) x 50mm (H)

1.57kg

### RESCUE SCISSOR

#### HA16/001



Non-load Bearing

Plastic with steel blade

Dimensions: 130mm x  
160mm

182g

### SNATCHER RATCHET

#### HL10/001



EN 1496 :2017

Orange 50mm 5ton  
Webbing, PVC & MetalDimensions:  
70cm to 175cm

1.4 kg

### 360 GRIPPY 3/4 GLOVES

#### HA13/004



Non-load Bearing

Pig Skin

Dimensions Available:  
small – XL

126g

### 360 GRIPPY FULL FINGER GLOVES

#### HA13/005



Non-load Bearing

Pig Skin

Dimensions Available:  
small – XL

126g

### 360 GRIPPY GOAT SKIN GLOVES

#### HA15/002



Non-load Bearing

Goat Skin

100 kg -120 kg

S = 72 g,  
M = 75 g,  
L = 80 g,  
XL = 85 g

### ROPE STITCH

#### HA7/001



Non-load Bearing

25mm Black Tubular Webbing  
Rope off-cuts, Black  
Thread, Plastic Sleeve

100 kg -120 kg


126g

# 360

heightsafe

TRAINING • GEAR • PROJECTS

# READY TO USE SYSTEMS

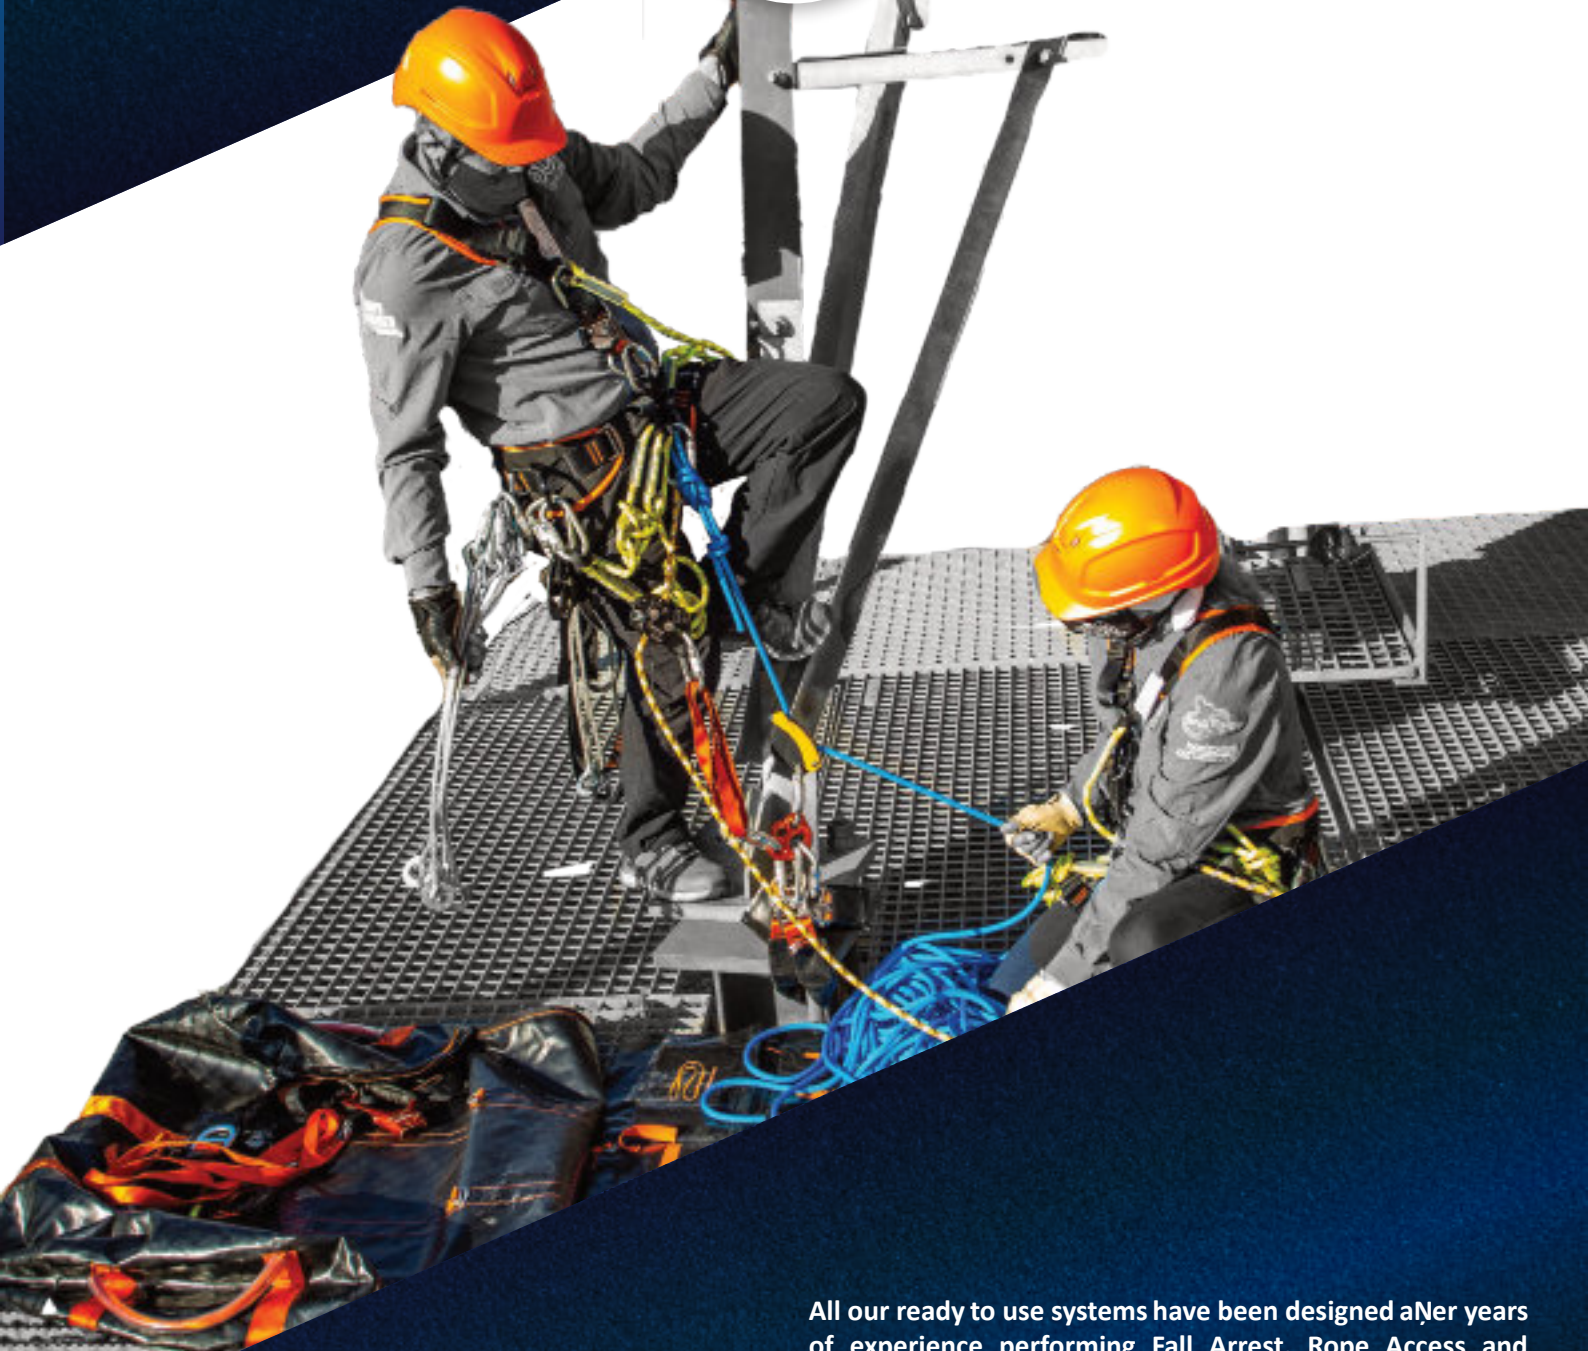

All our ready to use systems have been designed after years of experience performing Fall Arrest, Rope Access and rescue operations in various situations. These complete kits combine all necessary accessories and components already assembled for immediate use.







## NO LIMIT FALL ARREST KIT



### THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1x NIKKI INDUSTRIAL HELMET  
(SANS 1397)  
HM1/001



1x NO-LIMIT FALL ARREST HARNESS  
(SANS 50361 /50358)  
HH1/001



1xADJUSTABLE DOUBLE  
LANYARD SHOCK ABSORBER  
(SANS 50355/50354)  
HL3/002



1x WORK POSITIONING  
LANYARD(SANS 50358)  
HL1/001



1x GENERAL PURPOSE  
50L BLACK BAG  
HB2/001



1xOVAL MAILLON SHORT 10 MM  
(SANS 50362)  
HC4/002



2x 60cm OPEN ROUND SLING  
(SANS 50566)  
HS1/001

## HF1/001/T (S-L) | HF1/002/T (XL-XXL)

### DESCRIPTION

The No-Limits Fall Arrest Kit was designed with the professional Fall Arrest worker in mind. The harness comes complete with a Fall Arrest and work positioning system that will allow the user to have both hands free for technical work at heights.

### PRODUCT FEATURES:

- Ready to use technical Fall Arrest System
- Fully padded fully adjustable harness
- Chest and dorsal attachment on the harness
- Work positioning system incorporated
- Trauma step emergency loop incorporated into the harness
- Anchor Slings for connecting to larger anchor points
- Equipment carry Bag

### SPECIFICATIONS:

Material:	Various (See individual component specifications)
Weight:	6 kg
Dimensions:	Full kit in Bag: 450 mm (L) x 300 mm (H)
Standard:	See individual components.
Safe Working Load:	100 kg







## ROPE ACCESS BASIC KIT

## HF5/001 (S-L) | HF5/003 (XL-XXL)



### DESCRIPTION

The Rope Access Basic Kit is a ready to use personal Rope Access system. With this kit the individual technician will be able to perform all types of Basic Rope Access maneuvers without requiring any other additional equipment.

### PRODUCT FEATURES

- Ascending, Descending and back up Fall Arrest Devices in the kit
- Ready to use system that comes fully assembled
- Full adjustable and fully padded harness
- Sufficient connectors to assemble harness and anchor devices
- Chest, dorsal and back attachments on the harness
- Durable equipment carry Bag to transport the entire ready to use system
- Dynamic Rope Anchor Lanyard pre-stitched onto the harness, saving time during assembly as well as having to redo knots
- Sewn on Lanyards add a component of safety as there is no risk of knots coming undone

### SPECIFICATIONS:

Material:	Various (See individual components)
Weight:	9 kg
Dimensions:	700 mm (L) x 400 mm (H) X 500 mm (W)
Standard:	Various (See individual components)
Safe Working Load:	100 kg

### THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1x UVEX PHEOS HELMET  
(EN 397 / EN 12492)  
HM6/001



1x PROMAX ROPE ACCESS HARNESS COMPLETE  
(SANS 50361 / 50358 / 50813)  
HH2/003/COMP



1x CHEST ASCENDER (SANS 50567)  
HG1/002



1x HANDLE ASCENDER (SANS 50567)  
HG1/001



1x ANTHRONLYRY DESCENDER (EN 358 / EN 341 CLASS A  
/ EN 12841 TYPE C / EN 15151-1 TYPE 8)  
HD2/001



2x BACK UP DEVICE (SANS 50353-2)  
HG1/003



1x 5 STEP ETRIER / TAPE LADDER  
HA3/001



1x TOOL LANYARD  
HL4/001



1x ROPE ACCESS SEAT  
HA9/001



1x MULTI-PURPOSE TOOL POUCH  
HB2/001



1x LARG KIT BAG  
HB3/001



1x OVAL MAILLON LONG 7 MM (SANS 50362)  
HC4/001



1x DELTA MAILLON 8 MM (SANS 50362)  
HC5/001



1x DELTA MAILLON 10 MM (SANS 50362)  
HC5/002



4x D-SHAPE TWIST-LOCK KARABINERS (SANS 50362)  
HC2/002



6x OVAL TWIST-LOCK KARABINERS (SANS 50362)  
HC1/002



2x 15M X 10.5 MM DYNAMIC ROPE (SANS 50892)  
HR3/001



1x 1M X 10.5 MM DYNAMIC ROPE (SANS 50892)  
HR3/001



1x 2M X 10.5 MM DYNAMIC ROPE (SANS 50892)  
HR3/001



9x ROPE STITCH  
ASS002



## ROPE ACCESS PROFESSIONAL KIT HF5/002 (S-L) | HF5/004 (XL-XXL)



### DESCRIPTION

The Rope Access Professional Kit has the exact same basic components as the basic kit but in addition the kit comes complete with Access Ropes and anchoring equipment.

### THE KIT CONTAINS THE FOLLOWING COMPONENTS:

 <b>1xUVEX PHEOS ALPINE HELMET</b> (EN397 AND EN12492) HM6/001	 <b>1x OVAL MAILLON LONG 7 MM (SANS 50362)</b> HC4/001
 <b>1x PROMAX ROPE ACCESS HARNESS COMPLETE</b> (SANS 50361 / 50358 / 50813) HH2/003/COMP	 <b>1x DELTA MAILLON 8 MM (SANS 50362)</b> HC5/001
 <b>1x CHEST ASCENDER (SANS 50567)</b> HG1/002	 <b>1x DELTA MAILLON 10 MM (SANS 50362)</b> HC5/002
 <b>1x HANDLE ASCENDER (SANS 50567)</b> HG1/001	 <b>4x D-SHAPE TWIST-LOCK KARABINERS (SANS 50362)</b> HC2/002
 <b>1x ANTHRONY LORY DESCENDER (EN 358 / EN 341 CLASS A / EN 12841 TYPE C / EN 15151-1 TYPE 8)</b> HD2/001	 <b>6x OVAL TWIST-LOCK KARABINERS (SANS 50362)</b> HC1/002
 <b>2x BACK UP DEVICE (SANS 50353-2)</b> HG1/003	 <b>2x 1.5M ANCHOR STRAP (SANS 50566)</b> HS2/001
 <b>1x 5 STEP ETRIER / TAPE LADDER</b> HA3/001	 <b>2x ROPE PROTECTORS</b> HS7/001
 <b>1x TOOL LANYARD</b> HL4/001	 <b>2x 60cm OPEN ROUND SLING (SANS 50566)</b> HS1/001
 <b>1x ROPE ACCESS SEAT</b> HA9/001	 <b>2x 50M X 11 MM ALTUMAX ENDURO ACCESS ROPE (BLACK/ORANGE/ WHITE) (SANS 51891)</b> HR1/001
 <b>1x MULTI-PURPOSE TOOL POUCH</b> HB2/001	 <b>2x 1.5M X 10.5 MM DYNAMIC ROPE (SANS 50892)</b> HR3/001
 <b>2x GENERAL PURPOSE 50L BLACK BAG</b> HB2/001	 <b>1x 1M X 10.5 MM DYNAMIC ROPE (SANS 50892)</b> HR3/001
 <b>1x LARGE KIT BAG</b> HB3/001	 <b>1x 2M X 10.5 MM DYNAMIC ROPE (SANS 50892)</b> HR3/001
 <b>1x OVAL MAILLON SHORT 10 MM (SANS 50362)</b> HC4/002	 <b>9x ROPE STITCH</b> ASS002
 <b>1x OVAL MAILLON SHORT 10 MM (SANS 50362)</b>	 <b>2x 120CM OPEN ROUND SLING</b> HS1/002



## FALL ARREST SUPERVISOR KIT



## HF1/003 (S-L) | HF1/004 (XL-XXL)

### PRODUCT FEATURES

- Ready to use system that comes fully assembled
- Fully adjustable and padded sit harness designed for hanging in for longer periods of time
- Anchor Slings for connecting to larger anchor points
- Sufficient connectors to assemble harness and anchor devices
- Haultrack system to be used for plug in rescues
- Chest, dorsal and back attachments on the harness, ideal for any rescue to be performed
- Large equipment carry back to transport the entire, ready to use System.

### DESCRIPTION

The Fall Arrest Supervisor Kit is a combination of the Rope Access basic kit and an advanced Fall Arrest Rescue kit. The combination of both these types of access equipment allows the user to perform the full range of advanced Fall Arrest Rescue techniques in order to access the victim in any situation and the ability to perform a direct post Fall Arrest Pick-off rescue

### SPECIFICATIONS:

Material:	Various (See individual component specifications)
Weight:	14.5 kg
Dimensions:	300m (H) x 700 mm (L)
Rope Compatibility:	11 mm
Standard:	See individual components.
Safe Working Load:	100 kg

### THE KIT CONTAINS THE FOLLOWING COMPONENTS:

 1x UVEX PHEOS HELMET (EN 397 / EN 12492)	 6x OVAL TWIST-LOCK KARABINERS (SANS 50362) HC1/002
 1x PROMAX ROPE ACCESS HARNESS COMPLETE (SANS 50361 / 50358 / 50813) HH2/003/COMP	 2x 60cm OPEN ROUND SLING (SANS 50566) HS1/001
 1x CHEST ASCENDER (SANS 50567) HG1/002	 2x 15M X 10.5 MM DYNAMIC ROPE (SANS 50892) HR3/001
 1x HANDLE ASCENDER (SANS 50567) HG1/001	 1x 1M X 10.5 MM DYNAMIC ROPE (SANS 50892) HR3/001
 1x ANTHRONY LORY DESCENDER (EN 358 / EN 341 CLASS A / EN 12841 TYPE C / EN 15151-1 TYPE 8) HD2/001	 1x 2 M X 10.5 MM DYNAMIC ROPE (SANS 50892) HR3/001
 2x BACK UP DEVICE (SANS 50353-2) HG1/003	 9x ROPE STITCH ASS002
 1x OVAL MAILLON LONG 7 MM (SANS 50362) HC4/001	 1x 5 STEP ETRIER / TAPE LADDER HA3/001
 1x DELTA MAILLON 8 MM (SANS 50362) HC5/001	 1x ROPE ACCESS SEAT HA9/001
 1x DELTA MAILLON 10 MM (SANS 50362) HC5/002	 1x MULTI-PURPOSE TOOL POUCH HB2/001
 4x D-SHAPE TWIST-LOCK KARABINERS (SANS 50362) HC2/002	 1x OVAL MAILLON SHORT 10 MM (SANS 50362) HC4/002
 1x GENERAL PURPOSE 50L BLACK BAG HB2/001	 2x 50M X 11 MM ALTUMAX ENDURO ACCESS ROPE (BLACK/ORANGE/ WHITE) (SANS 51891) HR1/001
 1x LARG KIT BAG HB3/001	











## TEMPORARY VERTICAL LIFE LINE

## HF3/001/006/007/008/009/010/011

HF3/001	.....	50 m
HF3/006	.....	5 m
HF3/007	.....	10 m
HF3/008	.....	15 m
HF3/009	.....	20 m
HF3/010	.....	25 m
HF3/011	.....	100 m



### THE KIT CONTAINS THE FOLLOWING COMPONENTS:

-  2xBACK UP DEVICE (SANS 50353-2)  
HG1/003
-  1x GENERAL PURPOSE  
50L BLACK BAG  
HB2/001
-  2x OVAL TWIST-LOCK KARABINERS (SANS 50362)  
HC1/002
-  1x 1.5M ANCHOR STRAP (SANS 50566)  
HS2/001
-  2x 50M X 11 MM ALTUMAX ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE) (SANS 51891)  
HR1/001
-  4x ROPE STITCH  
ASS002

The Temporary Vertical Life Line Kit is a Fall Arrest System that allows faster vertical movement when working at height. This is a rope based life line kit that comes complete with a Mobile Fall Arrestor, connectors, an Anchor Sling and a carry Bag. The mobile Fall Arrestor is used as a Fall Arrest Device that gets attached to the front chest attachment point of the harness. The mobile Fall Arrest Device slides up and down the rope following the worker's movement and will automatically lock in the event of a fall. This kit comes in a complete ready to use system for the use of climbing vertically when needing to access an area where work at height is to be performed.

- Tamperproof system
  - connectors and backup devices cannot be removed
- No knots in the system
- Light weight
- Durable
- Easy to use

### SPECIFICATIONS:

Material:	Various (See individual components specification)
Weight:	5m = 1.6 kg, 10m = 2 kg, 15m = 2.4 kg, 20m = 3 kg, 25m = 3.5 kg, 50m = 5.4 kg, 100m = 9.6 kg, 150m = 13.8 kg, 200m = 18.1 kg
Dimensions:	300 mm (H) x 500 mm (L)
Standard:	SANS 50353-2
Safe Working Load:	120 kg



## TEMPORARY HORIZONTAL LIFE LINE 20M

HF3/003



## DESCRIPTION

The HSG Horizontal Temporary Life line of 20m is the only temporary life line system with a unique built in Shock Absorber that has been tested and conforms to SANS 50795. It can be used as a secure, temporary, anchored system in an open working area where there is a risk of a fall. This life line can carry two technicians concurrently and has been tested and certified for a safe working load of 280 kg. This system is easy to install and can be used in conjunction with any type of Fall Arrest Device, such as a Shock Absorbing Lanyard, Temporary Vertical Life Line, and/or retractable life line as well as a Mobile Fall Arrest.

## PRODUCT FEATURES

- integrated Shock Absorber
- Durable UV resistant Webbing
- Compact transportability
- Ready to use
- Easy installation of the system

## SPECIFICATIONS:

Material:	Webbing, PVC and Mild steel
Weight:	20 m = 6 kg
Dimensions:	500 mm (L) x 300 mm (H)
Rope Compatibility:	11 mm
Standard:	Various (See individual components)
Safe Working Load:	150 kg

## THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1X EQUIPMENT CARRY BAG



1X 20 m TENSIONING WEBBING SYSTEM

1X Shock Absorber  
(SANS 50795)

1x 5 TON RATCHET

2X 2.5 TON BOW SHACKLE  
(EN 397 / EN 12492)4 x 1.5M ANCHOR STRAP  
(SANS 50566)  
HS2/001



## ROPE RIGGER



THE KIT CONTAINS THE FOLLOWING COMPONENTS:

### MAIN KIT



1 X ROPE RIGGER KIT BAG  
HB3/004



1x ANTHRON LORY DESCENDER  
(EN 358 / EN 341 CLASS A /  
EN 12841 TYPE C / EN 15151-1  
TYPE 8)  
HD2/001



2x ROPE GRAB (SANS 50567)  
HG4/001



5 x CLIMAX SINGLE LARGE  
PULLEY  
HP1/003



1 x RIGGING PLATE (SMALL)  
HA4/001



14x D-SHAPE TWIST-LOCK  
KARABINERS (SANS 50362)  
HC2/002



2x 80cm WIRE ROPE SLING  
(SANS 50566)  
HS3/002



4 x 1.5M ANCHOR STRAP  
(SANS 50566)  
HS2/001



1X 200M X 11MM ALTUMAX  
ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE)  
(SANS 51891)  
HR1/001



2x ROPE STITCH  
ST1003



1x 120CM OPEN ROUND SLING  
HS1/002

## HF7/002

### DESCRIPTION

The Rope Rigger was specifically designed for light weight rope rigging operations in the telecommunications sector. This it will enable the user to lift and lower a load as well as guide it away from the structure during the hauling process. The Rope Rigger kit consist out of three smaller kits.

### PRODUCT FEATURES

- The Main kit is designed for the main lifting and lowering process of the antenna, brackets or tower segments.
- Lowering and hauling for the full length of the rope

### SPECIFICATIONS:

Material:	Various (See individual components)
Weight:	200m <sup>2</sup> - 12 kg
Dimensions:	1m (L) x 70 cm (W) x 50 cm (H)
Rope Compatibility:	11 mm
Standard:	Various (See individual components)
Safe Working Load:	150 kg

### THROW ROPE



1 X THROW ROPE BAG  
HB1/001



100Mx 5mm > BLACK ACCESSORY CORD  
HR4/001

### GUIDE KIT



1 X GUIDE ROPE KIT BAG  
HB3/005



1x ANTHRON LORY DESCENDER  
(EN 358 / EN 341 CLASS A /  
EN 12841 TYPE C / EN 15151-1  
TYPE 8)  
HD2/001



1x D-SHAPE TWIST-LOCK  
KARABINERS (SANS 50362)  
HC2/002



2 x 1.5M ANCHOR STRAP  
(SANS 50566)  
HS2/001



1X 150M X 11MM ALTUMAX  
ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE)  
(SANS 51891)  
HR1/001



2x ROPE STITCH  
ST1003





## LOW FALL ARREST SYSTEM

## HF9/001/002/003/004/005

HF9/001	..... 25 m
HF9/002	..... 50 m
HF9/003	..... 100 m
HF9/004	..... 150 m
HF9/005	..... 200 m

### DESCRIPTION

The Low Fall Arrest System was designed for a person who is working at a relatively low height and there are no anchor points to attach a Fall Arrest System to. This system can be set up as an adjustable temporary anchor point over an object or roof. Once the Low Fall Arrest System is anchored in the required working area, a Temporary Vertical Life Line can be connected as a Fall Arrest System.

**NOTE:** You might require an additional Vertical Life Line with this system

### PRODUCT FEATURES







- Pre rigged ready to use system
- Easy to install

### SPECIFICATIONS:

Material:	Various (See individual components)
Weight:	25m = 4 kg, 50 m = 6.2 kg, 100m = 10,5 kg, 200m = 21 kg
Dimensions:	1m (L) x 70 cm (W) x 50 cm (H)
Rope Compatibility:	11 mm
Standard:	Various: See individual components
Safe Working Loads:	150 kg



### THE KIT CONTAINS THE FOLLOWING COMPONENTS:

-  2xANTHRON LORY DESCENDER (EN 358 / EN 341 CLASS A / EN 12841 TYPE C / EN 15151-1 TYPE 8)  
HD2/001
-  1x GENERAL PURPOSE  
50L BLACK BAG  
HB2/001
-  3xD-SHAPE TWIST-LOCK KARABINERS (SANS 50362)  
HC2/002
-  2x 1.5M ANCHOR STRAP (SANS 50566)  
HS2/001
-  3x ROPE PROTECTORS  
HS7/001
-  1x 11 MM ALTUMAX ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE) (SANS 51891)  
HR1/001



## SNATCHER RATCHET RESCUE KIT

**HF4/007 | 001/1/2/3**

HF4/007 .....50 m

HF4/001/1... 100 m

HF4/001/2... 150 m

HF4/001/3... 200 m



### DESCRIPTION

The Snatcher Self Rescue Kit is designed for Fall Arrest Rescue situations where small teams can perform their own rescue when a victim is not injured and can assist in the rescuing process. The system incorporates an ascending and abseiling escape system device that is used to transfer the weight off the Shock Absorbing Lanyard onto the Rescue System.

### PRODUCT FEATURES

- Ready to use fully assembled rescue escape system.
- Capable eyes in the Karabiners to ensure a tamper-proof system.
- Easy to use.

### SPECIFICATIONS:

Material: Various (See individual components)

Weight: 50m = 5 kg,  
100m = 10 kg,  
150m = 15 kg,  
200m = 20 kg

Dimensions: 500 mm (L) x 300 mm (H)

Rope Compatibility: 11 mm

Standard: Various (See individual components)

Safe Working Load: 150 kg

### THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1xGENERAL PURPOSE  
50L RED BAG  
HB2/002



1xANTHONY LORY DESCENDER  
(EN 358 / EN 341 CLASS A /  
EN 12841 TYPE C / EN 15151-1  
TYPE 8)  
HD2/001



1x 1.5M ANCHOR STRAP (SANS  
50566)  
HS2/001



1x11 MM ALTUMAX  
ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE)  
(SANS 51891)  
HR1/001



2x ROPE STITCH  
ASS002



3x OVAL TWIST-LOCK  
KARABINERS (SANS 50362)  
HC1/002



1x SNATCHER RATCHET  
EN 1496:2017  
HL10/001





## SNATCHER REMOTE FALL ARREST RESCUE KIT

**HF4/002/003/004/005**

HF4/002 .....50 m  
HF4/003 ..... 100 m  
HF4/004 ..... 200 m  
HF4/005 ..... 150 m

### PRODUCT FEATURES

- The system comes pre-rigged and ready-to-use
- Fully assembled with capŕve eyes to ensure a tamper-proof system
- Can be used in conjuncŕon with other Snatcher Remote kits to create more complex rescue retrieval systems
- Shoulders straps on the Bags for comfortable transportaŕon
- Separate compartment in the kit Bag to fit the extension pole for belŕer equipment management
- Easy to use, anchor to anchor methods and comes pre-rigged as a 3:1 or 5:1 system.

### SPECIFICATIONS:

Material:	Various (See individual components)
Weight:	50m = 9 kg, 100m = 13.25 kg, 150m = 17.5 kg, 200m = 21.75 kg
Dimensions:	700 mm (L) x 350 mm (H)
Rope Compatŕibility:	11 mm
Standard:	Various (See individual components)
Safe Working Load:	150 kg

### DESCRIPTION:

The Remote Fall Arrest Rescue Kit is designed for post Fall Arrest Rescue situaŕions when the vicŕim is unconscious and out of reach. The system comes complete with an extension pole (to be able to access the remote vicŕim) connected to a hauling and lowering system. The unresponsive vicŕim can be reached with the extension pole, lifŕed and lowered out to safety. The system can also be used for diagonal cable ways for vicŕim recovery in conjuncŕon with a combinaŕon of two Snatcher™ remote rescue kits.

### THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1xHANDLE ASCENDER (SANS 50567)  
HG1/001



1xANTHRON LORY DESCENDER  
(EN 358 / EN 341 CLASS A /  
EN 12841 TYPE C / EN 15151-1  
TYPE 8)  
HD2/001



1 X SNATCHER RESCUE BAG  
HB4/001



1 X SNATCHER EXTENSION POLE BAG  
HB4/002



2 x CLIMAX LARGE TWIN PULLEY  
PULLEY  
HP1/003



1 x CLIMAX MINI PULLEY  
PULLEY  
HP1/003



1 x RIGGING PLATE (SMALL)  
HA4/001



3x D-SHAPE TWIST-LOCK  
KARABINERS (SANS 50362)  
HC2/002



4 x HAMMER LOCK  
HAM001



1xKONG FROG WITH CONNECTOR  
(SANS 50362)  
HC6/002



1x SNATCHER EXTENSION POLE (3,5M)  
HA5/001



1 x 0,5M ANCHOR STRAP  
(SANS 50566)  
HS2/002



1 x 1,5M ANCHOR STRAP  
(SANS 50566)  
HS2/001



2X 11MM ALTUMAX  
ENDURO ACCESS ROPE  
(BLACK/ORANGE/ WHITE)  
(SANS 51891)  
HR1/001



2xROPE STITCH  
STI003





## HAULTRACK SYSTEM

### HF6/001



HF9/001	..... 25 m
HF9/002	..... 50 m
HF9/003	..... 100 m
HF9/004	..... 150 m
HF9/005	..... 200 m

#### DESCRIPTION

The Haultrack System is a small manual hauling system designed for lifting a victim for very short distances, specifically during post-fall arrest pick-off rescues where the victim can only be accessed with the use of abseiling techniques.

#### PRODUCT FEATURES:

- Small and compact to be carried with the rescuer when performing a rescue
- 6:1 pre-assembled pulley system ratio makes it very easy to lift the victim with very little effort
- The rope grab device at the top of the system allows the rescuer to connect the hauling system directly in line with and onto his own working ropes.

#### SPECIFICATIONS:

Material:	Various (See individual components)
Weight:	490g
Dimensions:	290 mm (L) x 150 mm (H)
Rope Compatibility:	5mm Accessory cord
Standard:	Various: See individual components
Safe Working Loads:	100 kg

#### THE KIT CONTAINS THE FOLLOWING COMPONENTS:



1x CHEST ASCENDER  
(SANS 50567)  
HG1/002



1x SERIES 2g VEE-JAM CLEAT TRIPLE PULLEY  
HP3/001



1x BLOCK MULTI MINI TRIPLE PULLEY  
HP3/002



1x MULTI-PURPOSE TOOL POUCH  
HB1/002



1x OVAL MAILLON SHORT 7  
MM (SANS 50362)  
HC4/001



1x OVAL SCREW-GATE KARABINERS  
(SANS 50362)  
HC1/001



1x 9m x 5 mm ACCESSORY CORD  
(SANS 50564)  
HR4/001



## HEIGHT SAFE 360™

## KITS SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

### NO LIMIT FALL ARREST KIT

### HF1/001/T (S-L) | HF1/002/T (XL-XXL)



See individual components.

Various (See individual components specification)

100kg

6kg

### ROPE ACCESS BASIC KIT

### HF5/002 (S-L) | HF5/004 (XL-XXL)



Various  
(See individual components)

Various (See individual components specification)

100kg

20kg

### ROPE ACCESS PROFESSIONAL KIT

### HF7/002



Various  
(See individual components)

Various (See individual components specification)

150kg  
Rope Compatibility:  
11mm

12 kg

### FALL ARREST SUPERVISOR KIT

### HF1/003 (S-L) | HF1/004 (XL-XXL)



See individual components.

Various (See individual components specification)

100kg

14.5kg

### TEMPORARY VERTICAL LIFE LINE

### HF3/001/006/007/008/009/010/011



SANS 50353-2

Various (See individual components specification)

100kg

See below

5 m  
= 1.6 kg

10 m  
= 2 kg

15 m  
= 2.4 kg

20 m  
= 3 kg

25 m  
= 3.5 kg

50 m  
= 5.4 kg

100 m  
= 9.6 kg

150 m  
= 13.8 kg

200 m  
= 18.1 kg

### TEMPORARY HORIZONTAL LIFE LINE 20M

### HF3/003



Various  
(See individual components)

Webbing, PVC  
and Mild steel

150kg

See below

50 m = 5 kg

100 m = 10 kg

150 m = 15 kg

200 m = 20 kg

### ROPE RIGGER KIT

### HF5/001 (S-L) | HF5/003 (XL-XXL)



Various  
(See individual components)

Various (See individual components specification)

100 kg

9kg



## HEIGHT SAFE 360™

## KITS SPECIFICATION SHEET

TYPE	SANS CONFORMING STANDARDS	MATERIAL TYPE	SAFE WORKING LOAD	WEIGHT
------	---------------------------	---------------	-------------------	--------

### ADJUSTABLE ANCHOR LINE

### HF9/001/002/003/004/005



Various (See individual components)

Various (See individual components specification)

150kg  
Rope Compatibility: 11 mm

See below

25 m = 4 kg

50 m = 6.2 kg

100 m = 10,5 kg

200 m = 21 kg

### SNATCHER RATCHET RESCUE KIT

### HF4/007 | 001/1/2/3

Various  
(See individual components)

Various (See individual components specification)

150 kg

See below

50 m = 5 kg

100m = 10 kg

150 m = 15 kg

200 m = 20 kg

### SNATCHER REMOTE FALL ARREST RESCUE KIT

### HF4/002/003/004/005



Various (See individual components)

Various (See individual components specification)

150 kg

See below

50 m = 9 kg

100 m = 13.25 kg

150 m = 17.5 kg

200 m = 21.75 kg

### HAULTRACK SYSTEM

### HF5/001 (S-L) | HF5/003 (XL-XXL)

Various  
(See individual components)

Various (See individual components specification)

100 kg

490g



# 360

heightsafe

TRAINING • GEAR • PROJECTS

# ANCHOR SYSTEMS



These Anchor Systems are designed and developed after years of experience, performing fall arrest, rope access and rope rescue operations in various scenarios. These anchor systems are the most user friendly, ready to use, permanent anchor or temporary point system in the world.



## HEIGHTSAFETYLINE™

The Heightsafetyline™ Safe Point Pro™ is a permanent anchor point that can be used for Fall Arrest, Rope Access and Rope Rescue applications. The new design of the Safe Point Pro replaces the old Safe Point design and is a more balanced symmetrical design that ensures equal force distribution during a fall.


The Safe Point Pro™ does not only allow for a fast, safe and an easy anchoring point but will also assist in absorbing the energy in the event of the fall.

Manufactured from a 316 grade stainless steel of 4,5 mm thick the Safe Point™ is a robust, weather proof device that will last in the harshest conditions. The shock absorber will keep the forces generated during the fall below 6 kN and once fully deployed the failure point of the material is 50 kN.


This unique patented anchor system design, allows for easy attachment to almost any type of structure. Safe Point Pro™ has no moving parts and or components that can get lost or that require additional maintenance. The simple easy-to-use anchoring system will guarantee the safest anchoring connection on this planet.



## SAFE POINT™

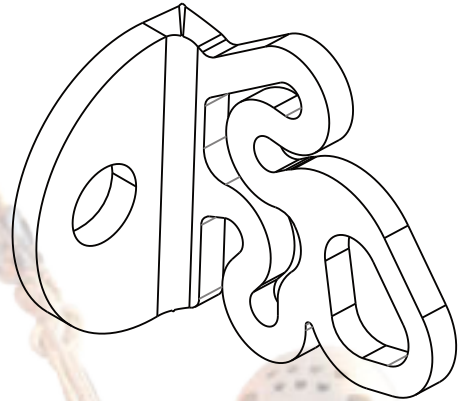

Safe Point - [HSL/SP/COM](https://www.anchor-systems.com/HSL/SP/COM)  
Patent: 2015/08346

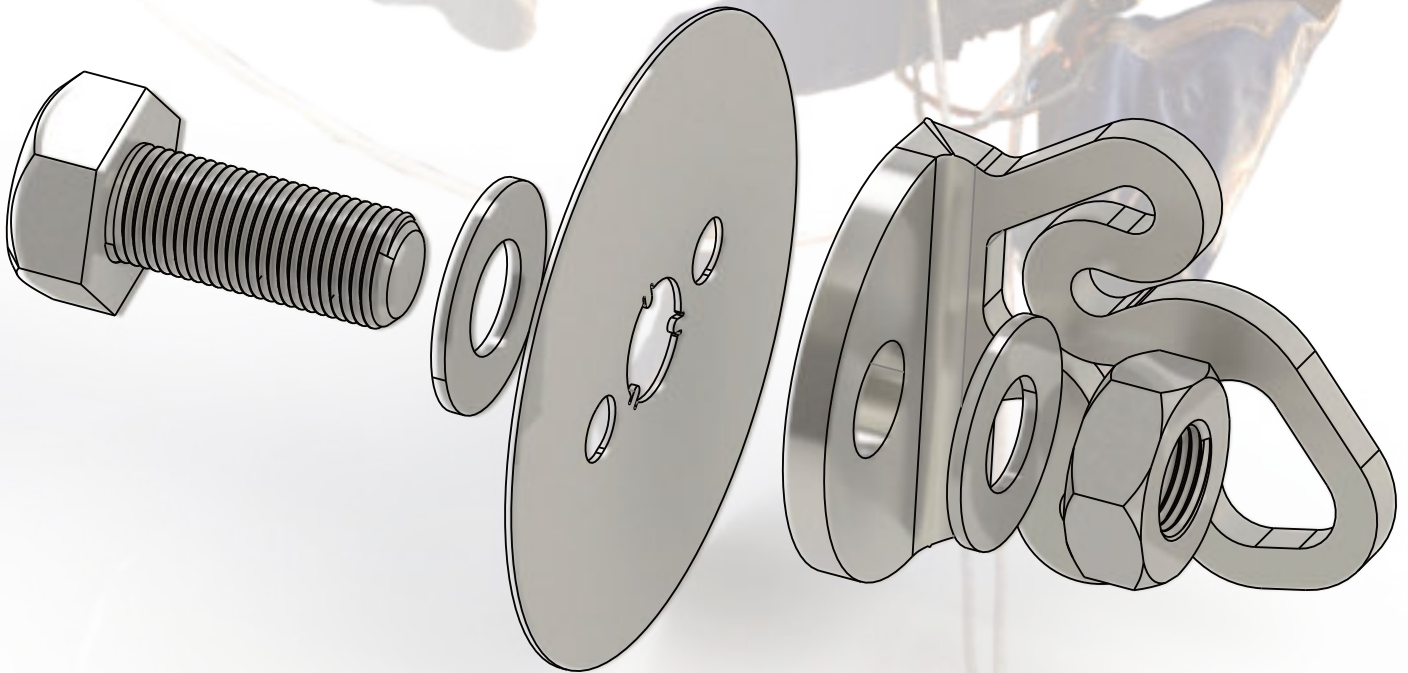





## DEAD WEIGHT PRO ANCHOR SYSTEM **HF8/005 | HF8/005/COM**



### DESCRIPTION

The Dead Weight system is specifically designed as a movable free-standing anchor point for Fall Arrest and rope access purposes. The Dead Weight system is merely an anchor point to which you can connect rope access or fall arrest system. On the back and front of the Dead Weight is two sets of load bearing D-ring type connection points. This set of points that is next to each other needs to be used in conjunction with each other. Do not connect to only one D-ring. Both must be used together. The deadweight system has been designed to be used in conjunction with each other. This means that more than one system can be connected to each other to increase the safe working load or set up a temporary lifeline system over a structure.

### PRODUCT FEATURES

- Lightweight
- Easy installation of the system
- Two Connection Points
- Small storage space

### DESCRIPTION

Material:	Webbing, PVC, and Mild steel
Weight:	14Kg
Dimensions:	500mm (L) x 300mm (H)
Standard:	SANS 50795
Kit Compatibility:	Adjustable Anchor Line and Temporary Vertical LifeLine
Safe Working Load:	150Kg

## HARU BEAM CLAMP ROLLING

## **HRL3/001**



### DESCRIPTION

EN365: 2005 and EN795: 2013 type B certified

### PRODUCT FEATURES

- Brand: Haru
- Product Type: Trolley
- Material: Aluminium/Stainless Steel
- Maximum beam width: 35 cm
- Maximum rail thickness: 3.5 cm
- Anchor strength: 2300 kg
- Maximum load: 140 kg
- Weight: 6.8 kg

### DESCRIPTION

Material:	Shackle, Fixed Sleeve and Sliding Sleeve - Steel SCM440, Shackle Screw - Alloy Steel, H-Inch Bar Screw and Roller Plate - Stainless Steel SUS304
Strength:	12 kN
Anchor Device:	type B acc. to EN 795:2012, intended for using by only one person
Using:	The product must not be used separately for arrestment of user's free fall.





## HARU BEAM CLAMP STATIC

## HSL/BC/35



### DESCRIPTION

EN365: 2005 and EN795: 2013 type B certified

### PRODUCT FEATURES

- Brand: Haru
- Product Type: Trolley
- Material: Aluminium
- Maximum beam width: 35 cm
- Maximum rail thickness: 3.2 cm
- Anchor strength: 2300 kg
- Maximum load: 140 kg
- Weight: 1.7 kg

### DESCRIPTION

Material:	Rod - Aluminum Alloy 7075, Hanging ring - Aluminum Alloy 6061, Ring - Stainless steel, Rotating D ring and Rotating Tring - SNCM440 12 kN
Strength:	12 kN
Anchor Device:	type B acc. to EN 795, intended for using by only one person
Using:	The product must not be used separately for arrestment of user's free fall.

## HARU TRIPOD

## TRI20M | TRI30M



### DESCRIPTION:

Portable Lightweight Aluminium Tripod for Man-Riding, and Rescue Applications. Anchorage connector and winch for typical confined space and rescue systems. Easily installed by one person, the self-locking, fully adjustable legs of the tripod lock securely in place thanks to the automatic pins. Complete with work winch, compact and robust, both a rescue and material winch.

### PRODUCT FEATURES:

- Aluminium Tripod
- 2 Anchorage points
- Self locking
- Fully adjustable legs with rubber feet
- Height 2.40m.
- Additional cable pulley to attached retractable lifeline.

### BRAKE WENCH:

- 4.8mm x 20m work winch, galvanized steel cable. For confined space & rescue application. Safe Load 100KG

[illegible]



For more information, please contact us at:

Tel: +27(0)86 112 7749

Fax: +27(0)11 314 2733

Mail: [sales@heightsafe360.co.za](mailto:sales@heightsafe360.co.za)

Website: [www.heightsafe360.com](http://www.heightsafe360.com)

1030 Sixteenth Street,  
Unit I1, Tillbury Business Park  
Randjespark, Midrand  
1685

**2021 - 2022 | GEAR CATALOGUE**

